


## FO subrack OV-BG

19"/3U and 19"/4U

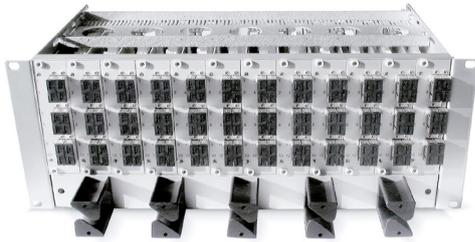

FO subrack OV-BG 4U, configuration example with 12 slide-in modules SCD, cassette for excess cable length and support brackets.

### Description

Modular solution for the termination of multiple-fibre cables - maximum of 288 fibres.  
Suitable for a wide range of applications - depending on the type of FO slide-in modules or front plates (maximum of 12).

### General Properties

Cable entry	from rear, via the cassette for excess cable length (only for 4U version)
Capacity	84HP, up to 12 slide-in modules or front plates 3U/7HP
Colour	silver
Housing	Solid aluminium profile with side walls, integrated 19"/3U fixation on the front and pre-assembled guide rail for FO slide-in modules

### Scope of delivery

19"/4U variant delivered with cassette for excess cable length and 5 support brackets

### Versions

Material number	Product	Outer dimensions	Weight [kg]
416980	FO subrack 3U (unloaded)	133 mm x 483 mm x 225 mm	1.5 kg
416907	FO subrack 4U (unloaded), with cassette for excess cable length	178 mm x 483 mm x 295 mm	1.5 kg
416981	Blank front plate for FO subrack		0.1 kg

Subject to technical modification

As of 2021-01-27 11:42:04