


FO subrack OV-BG

19"/3U and 19"/4U

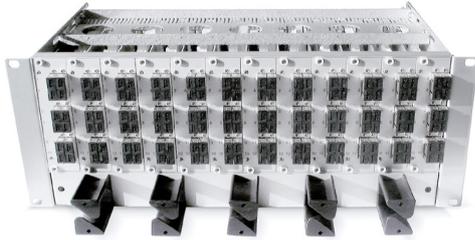

FO subrack OV-BG 4U, configuration example with 12 slide-in modules SCD, cassette for excess cable length and support brackets.

Description

Modular solution for the termination of multiple-fibre cables - maximum of 288 fibres.
Suitable for a wide range of applications - depending on the type of FO slide-in modules or front plates (maximum of 12).

Proprietà generali

| | |
|---------------|---|
| Alloggiamento | Solid aluminium profile with side walls, integrated 19"/3U fixation on the front and pre-assembled guide rail for FO slide-in modules |
| Capacità | 84HP, up to 12 slide-in modules or front plates 3U/7HP |
| Colour | argento |
| Ingresso cavi | from rear, via the cassette for excess cable length (only for 4U version) |

Scope of delivery

19"/4U variant delivered with cassette for excess cable length and 5 support brackets

Versions

| Numero Materiale | Product | Dimensioni esterne | Peso [kg] |
|------------------|---|--------------------------|-----------|
| 416980 | FO subrack 3U (unloaded) | 133 mm x 483 mm x 225 mm | 1,5 kg |
| 416907 | FO subrack 4U (unloaded), with cassette for excess cable length | 178 mm x 483 mm x 295 mm | 1,5 kg |
| 416981 | Blank front plate for FO subrack | | 0,1 kg |

Con riserva di modifiche tecniche

A partire da 2021-02-18 09:34:12