


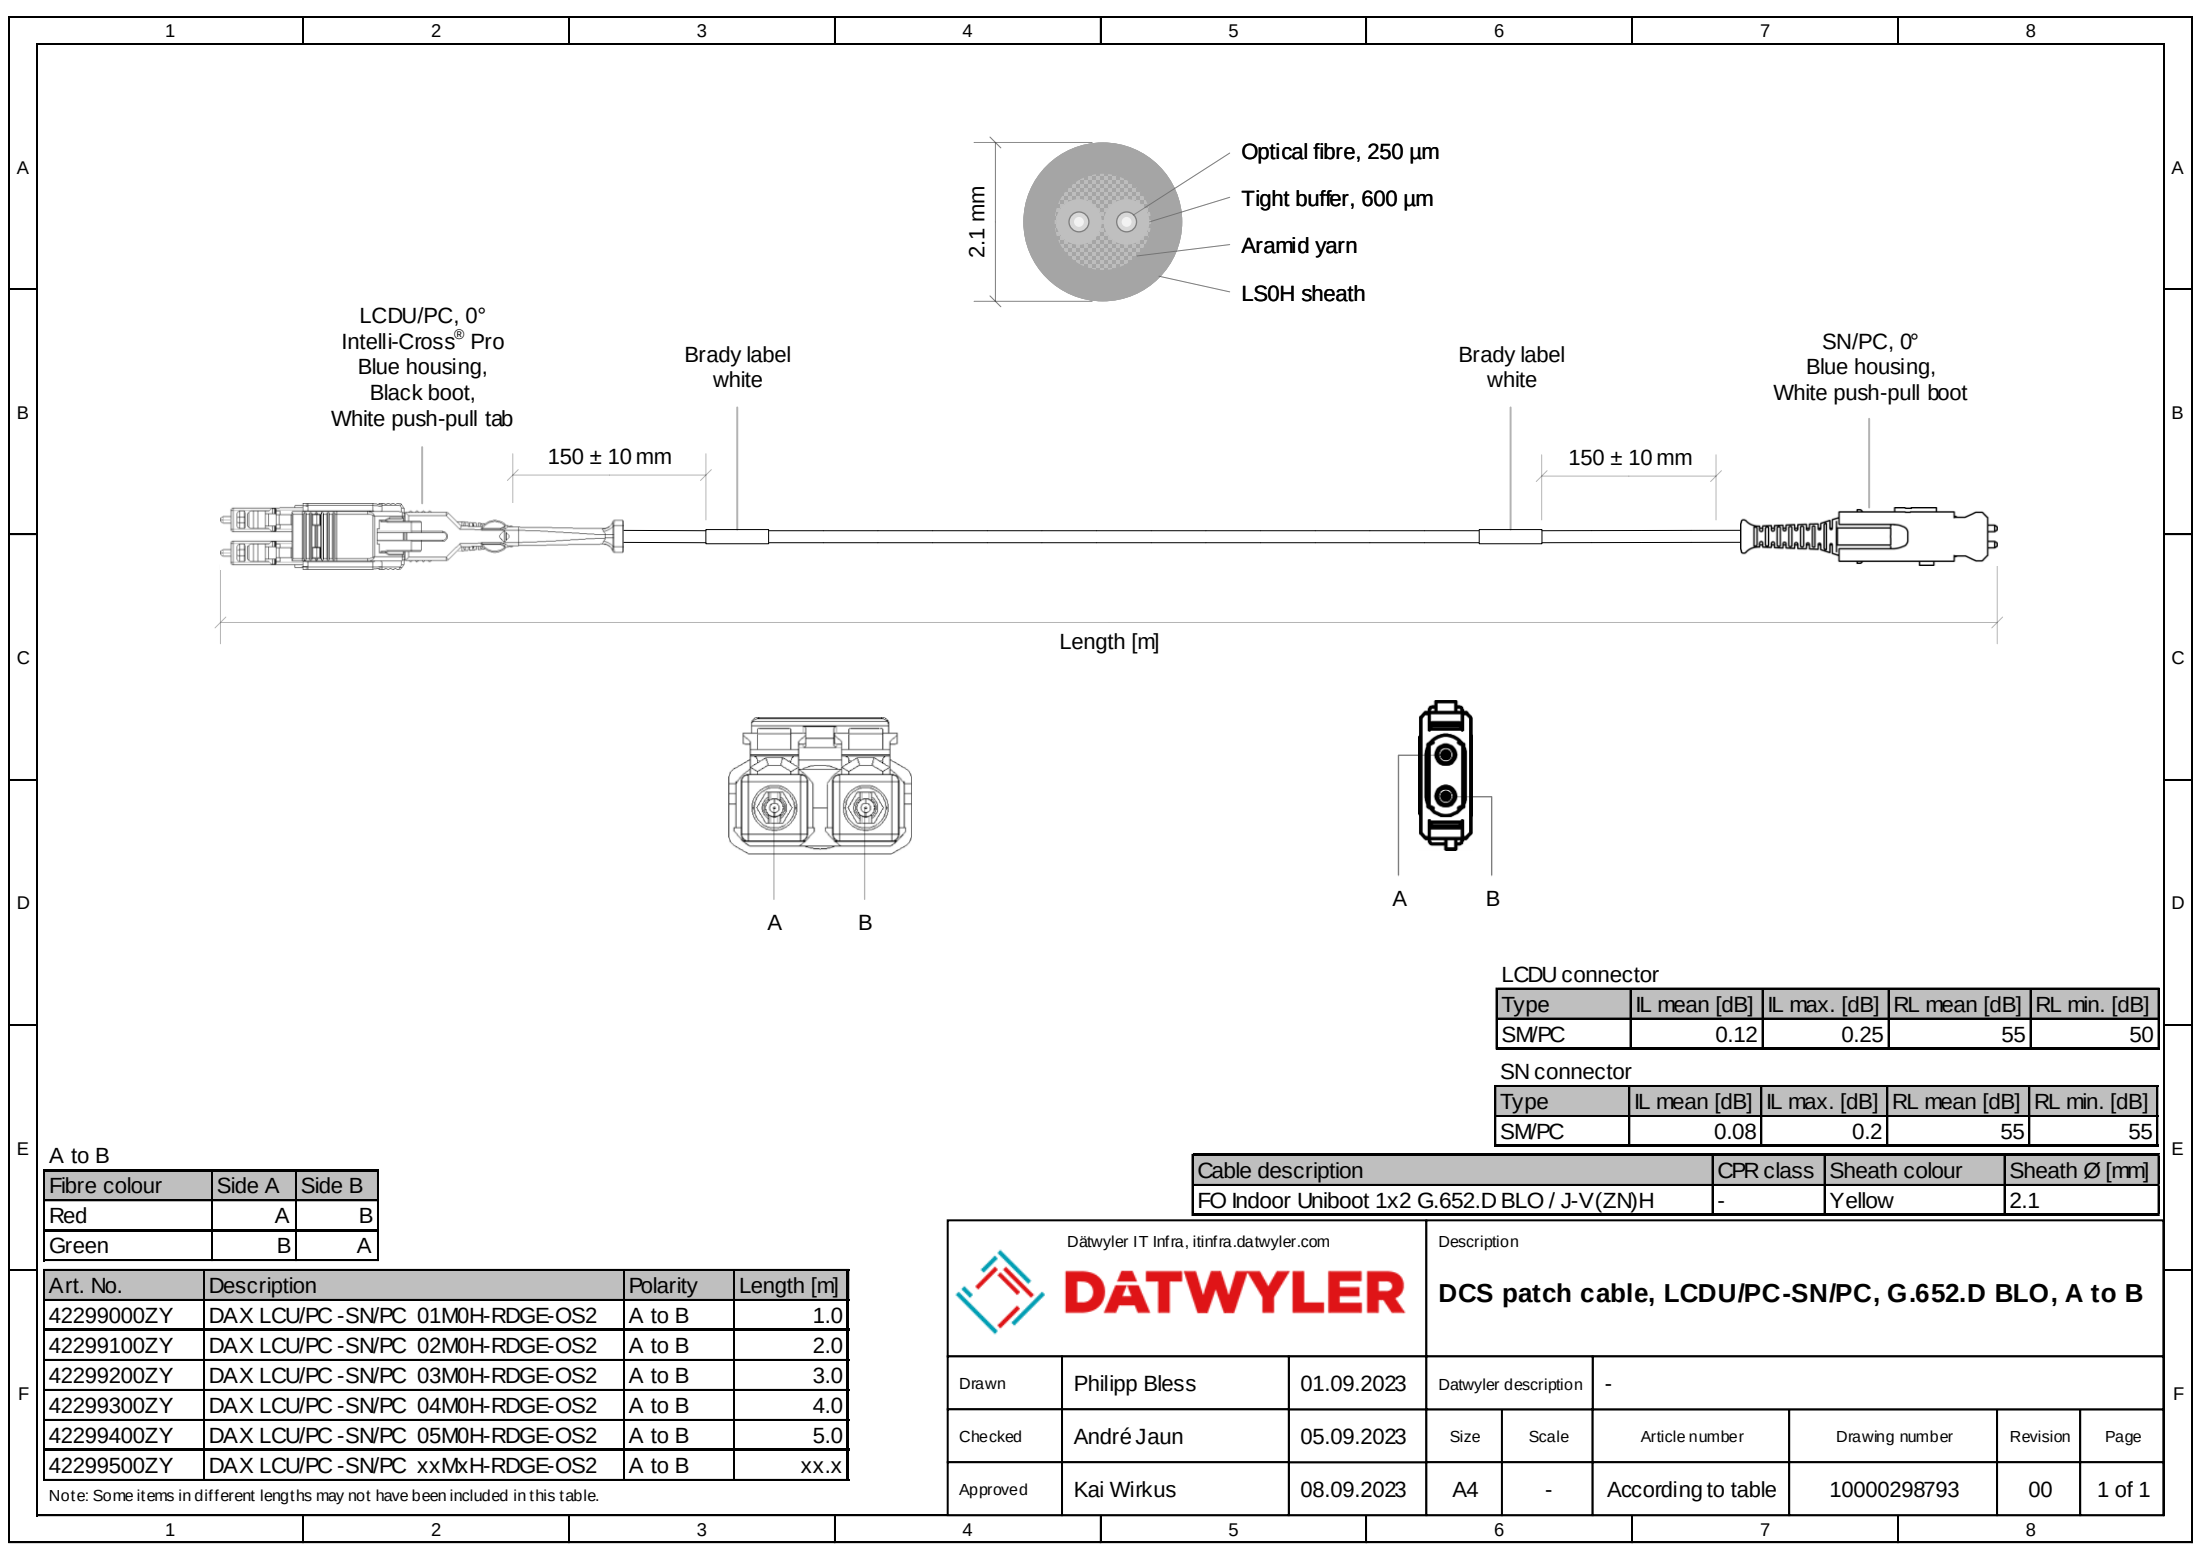

A

B

C

D

E

F

A

B

C

D

E

F

LCDU/PC, 0°
Intelli-Cross® Pro
Blue housing,
Black boot,
White push-pull tab

Brady label
white



Brady label
white

SN/PC, 0°
Blue housing,
White push-pull boot


150 ± 10 mm

150 ± 10 mm

Length [m]

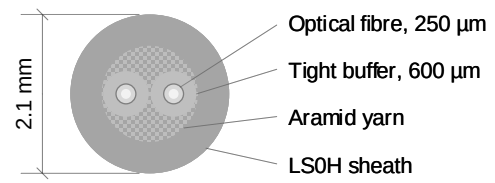

A B



A B

LCDU connector

Type	IL mean [dB]	IL max. [dB]	RL mean [dB]	RL min. [dB]
SM/PC	0.12	0.25	55	50

SN connector

Type	IL mean [dB]	IL max. [dB]	RL mean [dB]	RL min. [dB]
SM/PC	0.08	0.2	55	55

A to B

Fibre colour	Side A	Side B
Red	A	B
Green	B	A

Cable description	CPR class	Sheath colour	Sheath Ø [mm]
FO Indoor Uniboot 1x2 G.652.D BLO / J-V(ZN)H	-	Yellow	2.1

Art. No.	Description	Polarity	Length [m]
42299000ZY	DAX LCU/PC -SN/PC 01M0H-RDGE-OS2	A to B	1.0
42299100ZY	DAX LCU/PC -SN/PC 02M0H-RDGE-OS2	A to B	2.0
42299200ZY	DAX LCU/PC -SN/PC 03M0H-RDGE-OS2	A to B	3.0
42299300ZY	DAX LCU/PC -SN/PC 04M0H-RDGE-OS2	A to B	4.0
42299400ZY	DAX LCU/PC -SN/PC 05M0H-RDGE-OS2	A to B	5.0
42299500ZY	DAX LCU/PC -SN/PC xxMxH-RDGE-OS2	A to B	xx.x

Note: Some items in different lengths may not have been included in this table.



Dätwyler IT Infra, itinfra.datwyler.com

DATWYLER

Description
DCS patch cable, LCDU/PC-SN/PC, G.652.D BLO, A to B

Drawn	Philipp Bless	01.09.2023	Datwyler description		-			
Checked	André Jaun	05.09.2023	Size	Scale	Article number	Drawing number	Revision	Page
Approved	Kai Wirkus	08.09.2023	A4	-	According to table	10000298793	00	1 of 1