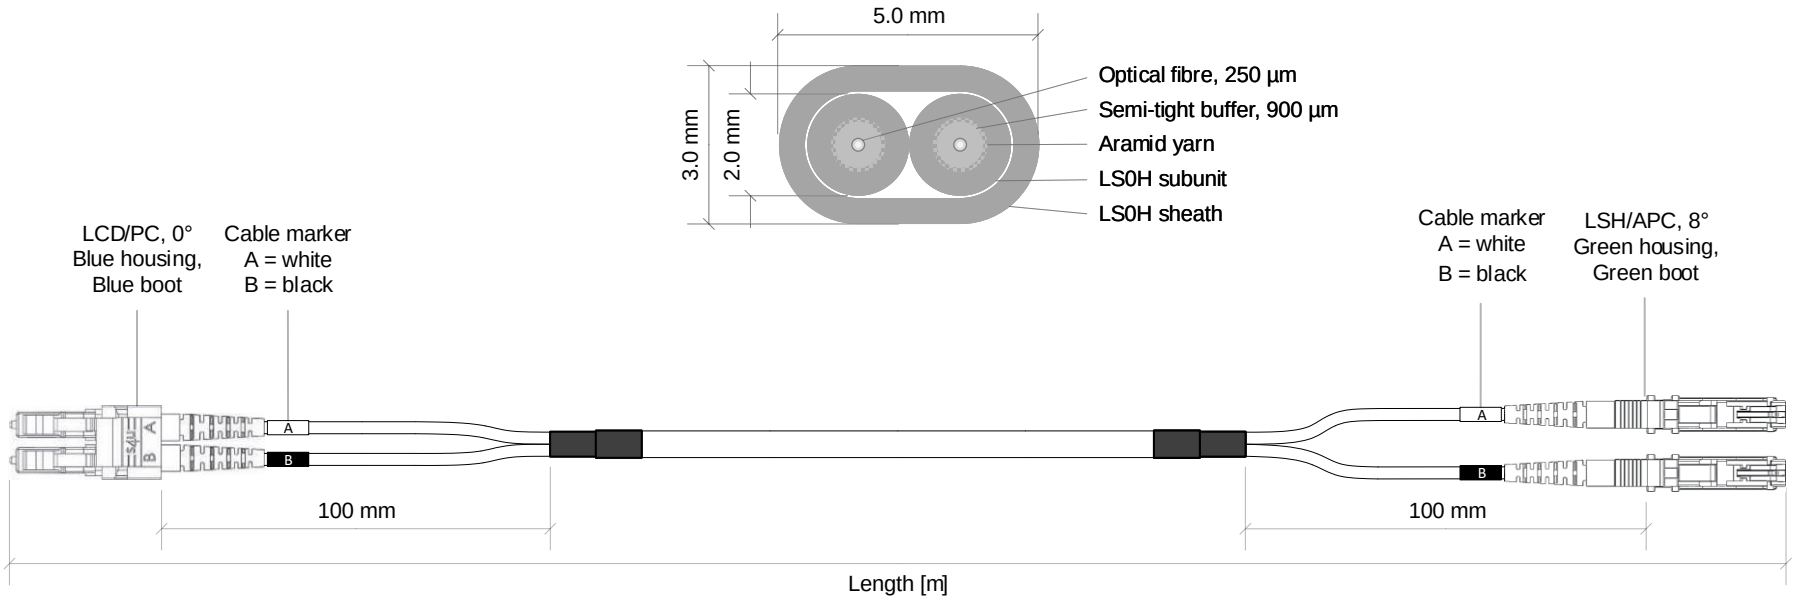

Type	IL mean [dB]	IL max. [dB]	RL mean [dB]	RL min. [dB]
SM/PC	0.12	0.25	55	50
SM/APC	0.12	0.25	70	65

Cable description	CPR class	Sheath colour	Sheath Ø [mm]
FO Indoor Duplex G.652.D BLO / I-V(ZN)HH	-	Yellow	2.0 (3.0 x 5.0)

Art. No.	Description	Polarity	Length [m]
423811	DAX LCD -LSH/APC01M0H-OVGE-OS2	-	1.0
423812	DAX LCD -LSH/APC02M0H-OVGE-OS2	-	2.0
423813	DAX LCD -LSH/APC03M0H-OVGE-OS2	-	3.0
423814	DAX LCD -LSH/APC04M0H-OVGE-OS2	-	4.0
423815	DAX LCD -LSH/APC05M0H-OVGE-OS2	-	5.0
423816	DAX LCD -LSH/APC06M0H-OVGE-OS2	-	6.0
423817	DAX LCD -LSH/APC07M0H-OVGE-OS2	-	7.0
423818	DAX LCD -LSH/APC08M0H-OVGE-OS2	-	8.0
423819	DAX LCD -LSH/APC09M0H-OVGE-OS2	-	9.0
423820	DAX LCD -LSH/APC10M0H-OVGE-OS2	-	10.0
423823	DAX LCD -LSH/APCxxMxH-OVGE-OS2	-	xx.x

Note: Some items in different lengths may not have been included in this table.

Dätwyler IT Infra, itinfra.datwyler.com

DÄTWYLER

Description

FO patch cable, LCD/PC-LSH/APC, figure 0, G.652.D BLO

Drawn	Philipp Bless	21.09.2023	Datwyler description	-				
Checked	André Jaun	23.09.2023	Size	Scale	Article number	Drawing number	Revision	Page
Approved	Kai Wirkus	25.09.2023	A4	-	According to table	10000299054	00	1 of 1