


CU 7002 6x4P Breakout Light (BOL)

Data cable, S/FTP, Category 7, AWG23, Euroclass Dca

1000 MHz

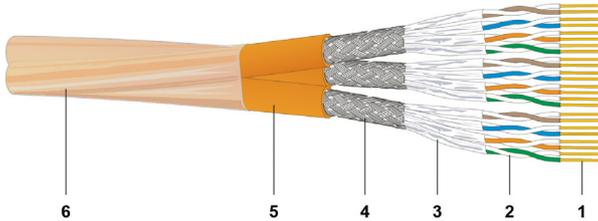

- 1 Inner conductor: AWG23 Bare copper wire
- 2 PE insulated conductor: 1.4 mm Ø
- 3 Screen (pair): Alu PETP foil
- 4 Overall screen: Tinned braided copper
- 5 Single cable sheath: FRNC/LS0H orange RAL 2003
- 6 Outer foil of Breakout Light (BOL) construction: Polyester foil, transparent, sealed



Descrizione

Electrically and mechanically superior quality Cat.7 data cable - exceeds the requirements of ISO/IEC 11801, IEC 61156-5, EN 50173-1 and EN 50288-4-1.

Excellent shielding effect due to individually screened pairs and overall copper braid.

Easy handling, small outer diameter and reduced weight thanks to the Breakout Light construction with outer polyester foil instead of an overall cable sheath.

Considerable shorter installation time due to the multi-cable construction.

Compatible with all current connecting hardware in accordance with EN 50173 and ISO/IEC 11801.

Applicazione

Data cable for structured premises cabling.

For the transmission of digital and analogue voice, video and data signals.

Suitable for all applications up to class F applications (600 MHz) in accordance with EN 50173-1 and ISO/IEC 11801 and for the transmission of broadband signals (such as cable TV) in accordance with IEC 15018.

Applicable for Power over Ethernet (PoE) / PoE+ and 4PPoE up to 100W.

Especially suitable for Consolidation Points (e.g. in open-plan offices).

Costruzione

Materiale della guaina esterna	FRNC/LSZH
Colore della guaina esterna	arancia

Proprietà generali

Installation temperature	0 °C - +50 °C
Operating temperature	-20 °C - +60 °C
Colore del filo	bianco/blu, bianco/arancio, bianco/verde, bianco/marrone, in conformità alle norme IEC 60189 e IEC 60708
Impronta	DATWYLER «cable type» «additional text» «batch number» «meter marks»
Campo di applicazione	Interno

Proprietà elettriche

Categoria	Cat.7
Gbit/s	A 10 Gbit/s
Loop resistance at 20 °C	140 Ω/km
Operating capacity	42 pF/m
Impedenza a 100 MHz, ±5Ω	100 Ω
NVP %	81
Ritardo Skew	12 ns/100 m
Schermatura	schermati
Near end unbalance attenuation LCL at 1-600 MHz	40 dB
Transfer impedance 1/10/30 MHz	< 6/6/10 mΩ/m
Attenuazione di accoppiamento	85 dB
Segregation class	d

Frequenza [MHz]	Categoria	Attenuazione [dB]	NEXT [dB]	PS-NEXT [dB]	ACR-N [dB]	PS-ACR-N [dB]	ACR-F [dB]	Perdita di ritorno [dB]
1		1,9	100	97	98	95	98	26
4		3,6	100	97	96	93	98	30
10		5,6	100	97	94	91	98	33
100	5e	17,9	100	97	82	79	78	33
250	6	28	100	97	72	69	69	28
500	6 _A	41	92	89	58	55	56	26
600	7	46	90	87	44	41	45	25
800		52	84	81	32	29	39	23
862		54	83	80	29	26	37	22
1.000		57	80	77	23	20	33	20

I dati sulle prestazioni indicati sono valori tipici misurati.

Proprietà meccaniche

Solid / Flex	stabile
AWG	23
Raggio di curvatura minimo (installato in modo permanente)	85 mm
Curvatura minima (durante l'installazione)	170 mm
Minimum number of impacts	10

Standards

Reaction to fire	EN 13501-6
Euroclass	D _{ca}
Densità del fumo	IEC 61034-1/-2, EN 61034-1/-2, VDE 0482-1034-1/-2, AREI-RGIE Section 4.3.3 SD
Zero alogeni nessun gas corrosivo	IEC 60754-1/-2, EN 60754-1/-2, VDE 0482-754-1/-2, AREI-RGIE Section 4.3.3 SA
Propagazione della fiamma	EN 60332-1-2, IEC 60332-1-2, VDE 0482-332-1-2
Standard dei cavi	ISO/IEC 61156-5, EN 50288-4-1
Cat./Class	Cat.7 / Class F
PoE	IEEE 802.3bt Type 4 (100W)

Versioni

Codice art.	Prodotto	Reaction to fire	Dimensions n x p x [mm (AWG)]	Dimensioni della guaina esterna [mm]	Tasso di CU [kg/km]	Weight [kg/km]	Fire load [kWh/m]	Unità di imballaggio	GTIN / EAN
18848600DZ	CU 7002 6x4P BOL	Dca-s2,d1,a1	6 x (4 x 2 x 0.57 (AWG23))	21.8	186,6	389,1	0,96	al metro	40393910034516

Con riserva di modifiche tecniche

A partire da 2025-03-20 13:50:19