

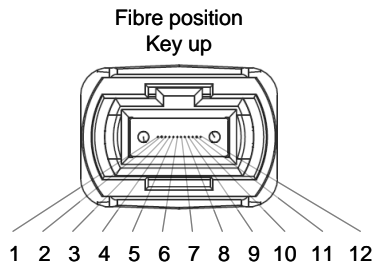
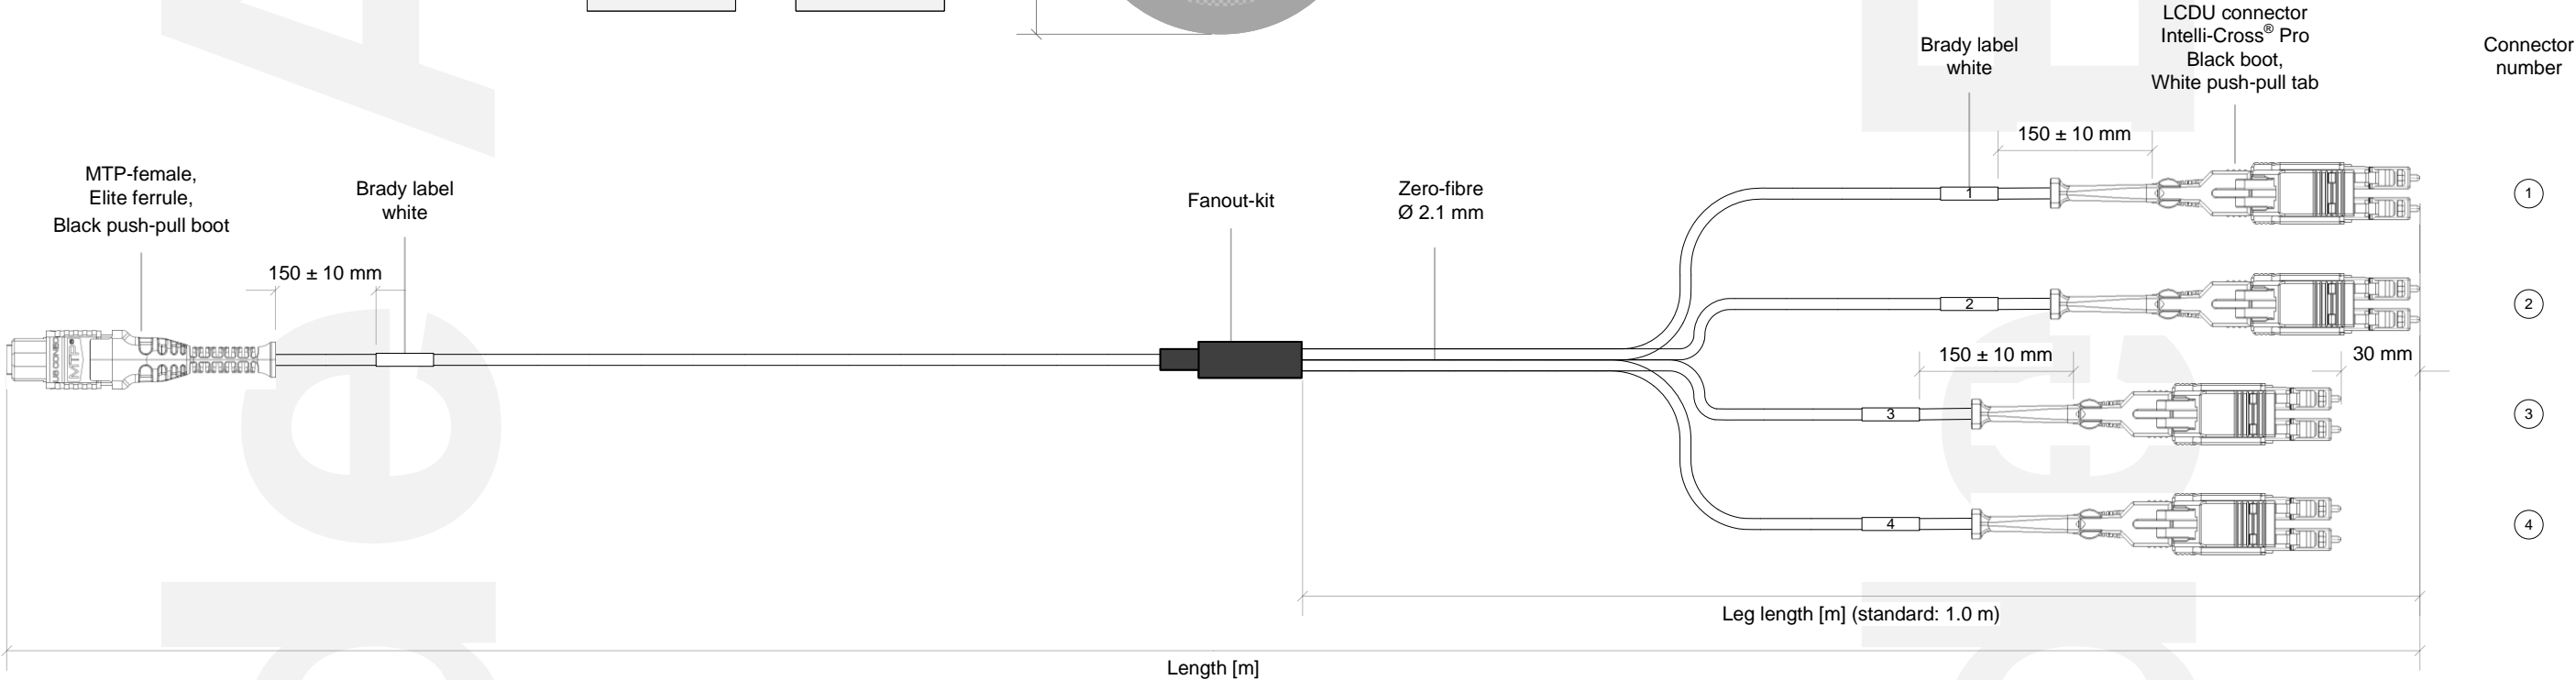


Brady label (cable)	
length [m]	art. no.
2.5 m	473781
2.5 m	473781

Brady label (leg)	
leg no.	
1	
1	

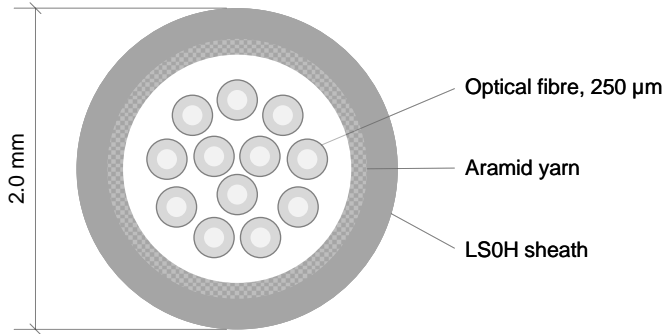


Polarity: Type A												
Colour	RD	GN	BU	YE	WH	GY	BN	VT	TO	BR	OG	PK
Side A	1	2	3	4	5	6	7	8	9	10	11	12
Side B	1A	2A	3A	4A	-	-	-	-	4B	3B	2B	1B

Colour code: DIN (IEC 60304)

Art. No.	Fibre type	Connector type A	Connector colour A	IL mean A [dB]	IL max. A [dB]	RL mean A [dB]	RL min. A [dB]	Connector type B	Connector colour B	IL mean B [dB]	IL max. B [dB]	RL mean B [dB]	RL min. B [dB]	Zero-fibre colour	Length [m]					
47379100ZY	G.652.D BLO	MTP/APC	Yellow	0.10	0.30	70	65	LCDU/APC	Green	0.12	0.25	75	65	Yellow	2.5					
47379300ZY								LCDU/PC	Blue	0.12	0.25	55	50		Turquoise	0.12	0.25	40	35	xx.x
473771																				2.5
473773																				xx.x
473781	OM3	MTP/PC	Aqua	0.15	0.25	45	35	Heather violet						0.12						0.25
473783			xx.x																	
473751	OM4		Magenta						Lime green	0.12	0.25	40	35		Heather violet	2.5				
473753			xx.x																	
473761	OM5	Lime	Lime green	0.12	0.25	40	35	2.5												
473763								xx.x												

Cable description	CPR class	Sheath colour	Sheath Ø [mm]
FO Indoor M-Patch 1x12 E9 G.652.D BLO / J-F(ZN)H	-	Yellow	2.0
FO Indoor M-Patch 1x12 G50 OM3 / J-F(ZN)H	-	Turquoise	2.0
FO Indoor M-Patch 1x12 G50 OM4 / J-F(ZN)H	-	Heather violet	2.0
FO Indoor M-Patch 1x12 G50 OM5 / J-F(ZN)H	-	Lime green	2.0

 Dätwyler IT Infra, itinfra.datwyler.com			Description					
Drawn			DCS fanout cable, 1x MTP-female-4x LCDU, type A, graduated					
Checked			DRW_DCS FC_1MTP-f-4LCDU_G_A					
Approved			According to table					
Philipp Bless			16.06.2025					
André Jaun			18.06.2025					
Kai Wirkus			20.06.2025					
A3			-					
-			-					
00			1 of 1					