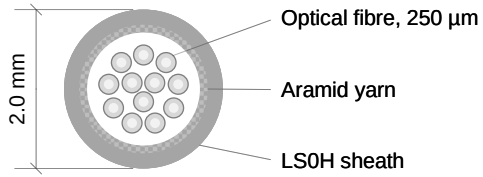

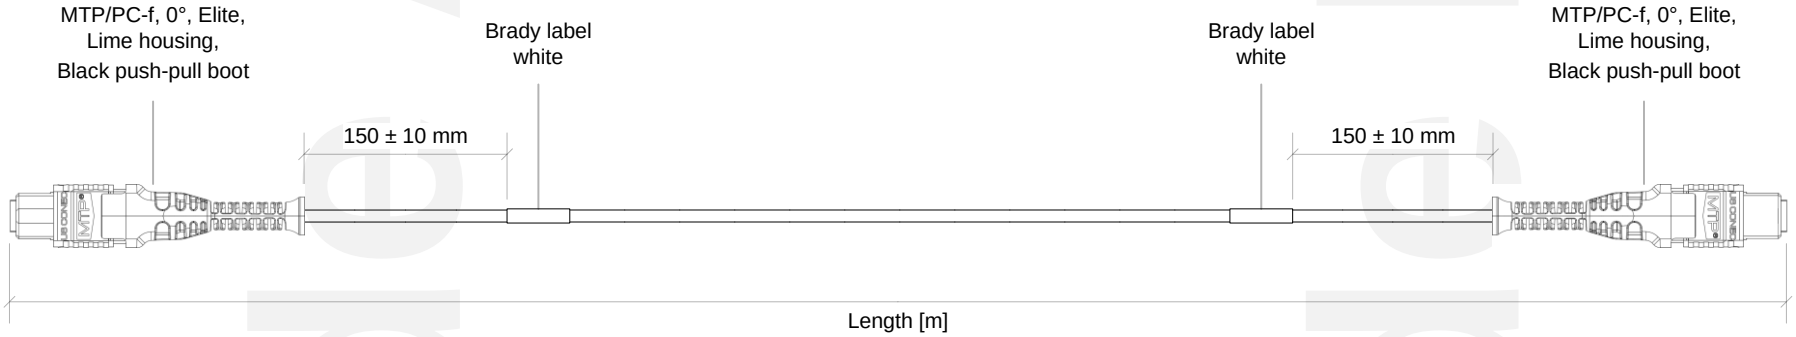

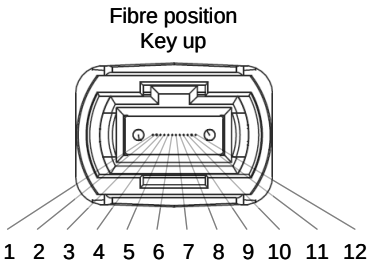

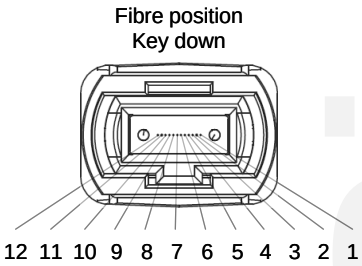

Brady label
length [m] art. no.

3 m	473232
3 m	473232

Type	IL mean [dB]	IL max. [dB]	RL mean [dB]	RL min. [dB]
MM/PC	0.15	0.25	45	35

Cable description	CPR class	Sheath colour	Sheath Ø [mm]
M-PATCH J-(ZN)H 12xG50/125 OM5	-	Lime green	2.0

Polarity: Type A (TIA-568.3-D)

Colour	RD	GN	BU	YE	WH	GY	BN	VT	TQ	BK	OG	PK
Side A	1	2	3	4	5	6	7	8	9	10	11	12
Side B	1	2	3	4	5	6	7	8	9	10	11	12

Colour code: DIN (IEC 60304)

Art. No.	Description	Polarity	Length [m]
473230	PCA - 1M1FP- 1M1FP -01M0-OM5-RDLG	Type A	1.0
473231	PCA - 1M1FP- 1M1FP -02M0-OM5-RDLG	Type A	2.0
473232	PCA - 1M1FP- 1M1FP -03M0-OM5-RDLG	Type A	3.0
473233	PCA - 1M1FP- 1M1FP -04M0-OM5-RDLG	Type A	4.0
473234	PCA - 1M1FP- 1M1FP -05M0-OM5-RDLG	Type A	5.0
473235	PCA - 1M1FP- 1M1FP -xxMx-OM5-RDLG	Type A	xx.x

Note: Some items in different lengths may not have been included in this table.

Dätwyler IT Infra, itinfra.datwyler.com

DATWYLER

Description

DCS patch cable, MTP/PC-female, OM5, type A

Drawn	Philipp Bless	28.10.2024	Drawing name	DRW_DCS PC_MTP/PC-f_OM5_A				
Checked	André Jaun	30.10.2024	Size	Scale	Article number	Document number	Revision	Page
Approved	Kai Wirkus	01.11.2024	A4	-	According to table	-	02	1 of 1