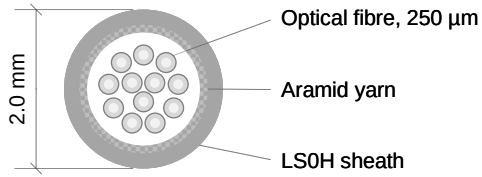

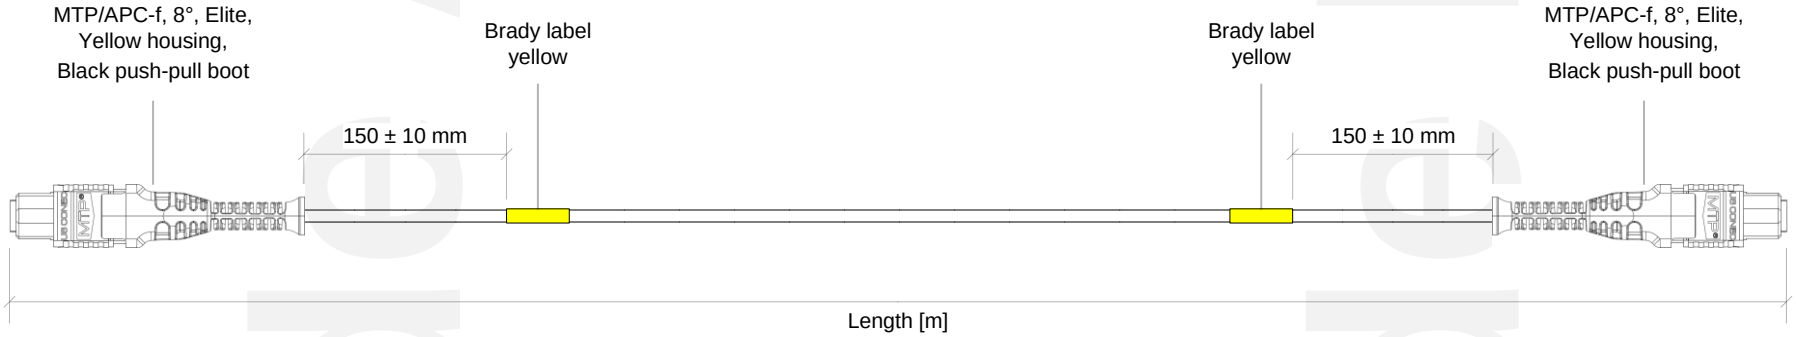

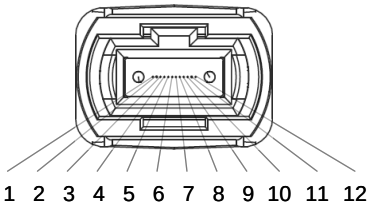

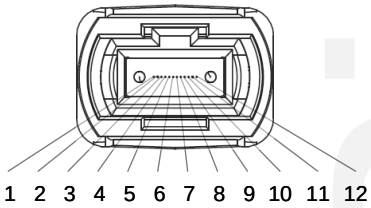

Brady label
length [m] art. no.

3 m 473272
3 m 473272

Type	IL mean [dB]	IL max. [dB]	RL mean [dB]	RL min. [dB]
SM/APC	0.10	0.30	70	65

Cable description	CPR class	Sheath colour	Sheath Ø [mm]
M-PATCH J-(ZN)H 12xE9/125 G.652.D BLO	-	Yellow	2.0

Polarity: Type B (TIA-568.3-D)

Colour	RD	GN	BU	YE	WH	GY	BN	VT	TQ	BK	OG	PK
Side A	1	2	3	4	5	6	7	8	9	10	11	12
Side B	12	11	10	9	8	7	6	5	4	3	2	1

Colour code: DIN (IEC 60304)

Art. No.	Description	Polarity	Length [m]
473270	PCB - 1M1FA- 1M1FA -01M0-OS2-RDYE	Type B	1.0
473271	PCB - 1M1FA- 1M1FA -02M0-OS2-RDYE	Type B	2.0
473272	PCB - 1M1FA- 1M1FA -03M0-OS2-RDYE	Type B	3.0
473273	PCB - 1M1FA- 1M1FA -04M0-OS2-RDYE	Type B	4.0
473274	PCB - 1M1FA- 1M1FA -05M0-OS2-RDYE	Type B	5.0
473275	PCB - 1M1FA- 1M1FA -xxMx-OS2-RDYE	Type B	xx.x

Note: Some items in different lengths may not have been included in this table.

Dätwyler IT Infra, itinfra.datwyler.com

DATWYLER

Description

DCS patch cable, MTP/APC-female, G.652.D BLO, type B

Drawn	Philipp Bless	28.10.2024	Drawing name	DRW_DCS PC_MTP/APC-f_OS2_B				
Checked	André Jaun	30.10.2024	Size	Scale	Article number	Document number	Revision	Page
Approved	Kai Wirkus	01.11.2024	A4	-	According to table	-	02	1 of 1