


FO-DCS fanout cables MTP-LCD, 12 fibres

for connecting active components

OM3, OM4, OS2

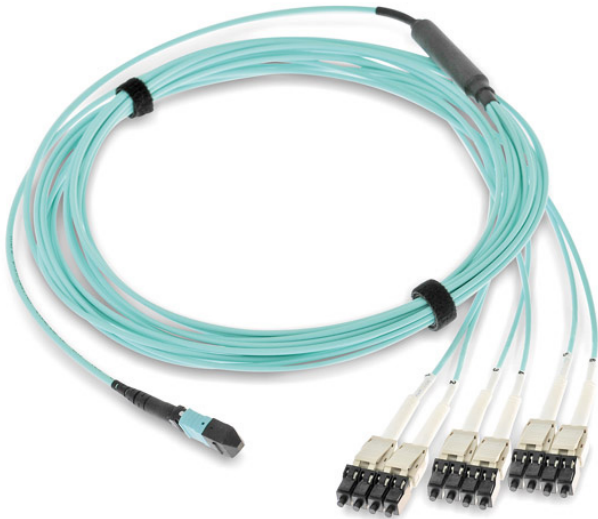

FO-DCS fanout cable, MTP-on-LCDU, 12 fibres

Description

Thin, very flexible fibre-optic fanout cable (round cable, Ø 3.0 mm) with 12 fibres.
 Low fire load due to its halogen-free flame-retardant LS0H sheath.
 OM3, OM4 and OS2 versions are available with 2.5 m standard length (other lengths on request).
 Standard polarisation modes can be type A or type C.
 Sticker labelling at both cable ends. Breakout separation is effected with a thin divider housing.
 The legs (Ø 2.2 mm) with LCD Uniboot (LCDU) plugs are numbered (1 - 6).
 The legs can be ordered graded in length or of equal length.
 Project-specific assemblies are available on request.

Application

OM3, OM4 und OS2 MTP®-on-LCD fanout cables are suitable for all high-performance applications in a data centre environment.
 The connection between six duplex ports and one parallel optic port enables quick and space-saving cabling of active components such as routers, switches, servers and storage systems.
 The fanout cables are assembled to a very high quality and guarantee optimum values for optical performance (IL/RL).

Scope of delivery

FO-DCS fanout cable (FR/LS0H) with 12 fibres OM3, OM4 or OS2 (G.652.D)
 High-performance connector assembly with MTP and LCD Uniboot
 Labelled using stickers at both cable ends
 Test reports (IL/RL) on all connectors
 Test reports (IL/RL) on all connectors

Note

MTP® is a registered brand of US Conec.

Versions

<STEPTABLE O="STEP_PRODUCT_100919" OT="Product" TT="267772" VC="CTX_english" VO="935905" W="Approved" />

