


HD-DCS patch cord LCD/PC - LCD/APC, E9/125 G.652.D BLO

High-performance

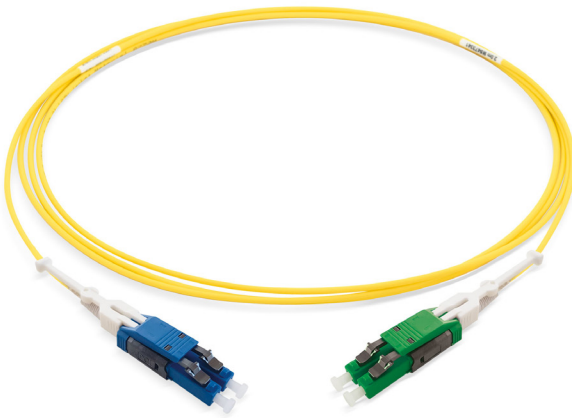

Description

Uniboot patch cable with Intelli-Cross mechanism for fast polarity change.
Compact cable design with FR/LSOH cable sheath (2.1 mm) and 2 fibres.
Available in standard lengths up to 10 m.
Other lengths available on request.
Connectivity A to A or A to B.
Sticker labelling at both cable ends.
Each patch cable is equipped with push-pull tabs.

Application

The LCD to LCD patch cables are suitable for all high-performance applications with duplex signals in the data center environment.
The round patch cables are assembled with LCD Uniboot Intelli-Cross Pro connectors (high-performance) at both ends.
The patch cables are assembled to a very high quality and guarantee optimum values for optical performance (IL/RL).

Scope of delivery

Duplex patch cable (FR/LSOH) with 2 fibres.
Supplied with test report.
Powerful connector arrangement with LCD Uniboot Intelli-Cross Pro at both ends.
Sticker labelling at both cable ends.
Packed in a transparent plastic sleeve and labelled.

Note

Connectivity methods according to TIA-568-C.3 and EN 50174-1

Versions

<STEPTABLE O="STEP_PRODUCT_270685" OT="Product" TT="267772" VC="CTX_english" VO="935905" W="Approved" />