


## HD-DCS patch cord LCD/PC - LCD/PC, E9/125 G.652.D BLO

High-performance

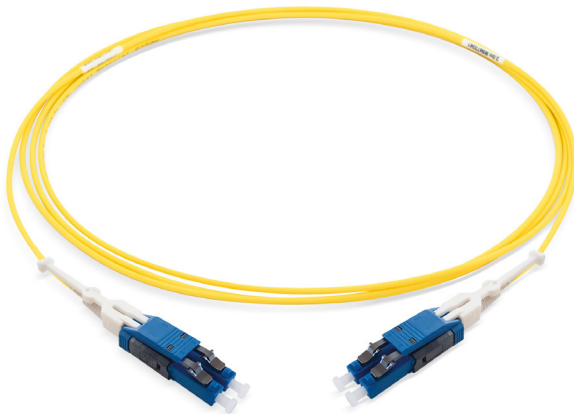

### Description

Uniboot patch cable with Intelli-Cross mechanism for fast polarity change.  
Compact cable design with FR/LSOH cable sheath (2.1 mm) and 2 fibres.  
Available in standard lengths up to 10 m.  
Other lengths available on request.  
Connectivity A to A or A to B.  
Sticker labelling at both cable ends.  
Each patch cable is equipped with push-pull tabs.

### Application

The LCD to LCD patch cables are suitable for all high-performance applications with duplex signals in the data center environment. The round patch cables are assembled with LCD Uniboot Intelli-Cross Pro connectors (high-performance) at both ends. The patch cables are assembled to a very high quality and guarantee optimum values for optical performance (IL/RL).

### Scope of delivery

Duplex patch cable (FR/LSOH) with 2 fibres.  
Supplied with test report.  
Powerful connector arrangement with LCD Uniboot Intelli-Cross Pro at both ends.  
Sticker labelling at both cable ends.  
Packed in a transparent plastic sleeve and labelled.

### Note

Connectivity methods according to TIA-568-C.3 and EN 50174-1

### Versions

<STEPTABLE O="STEP\_PRODUCT\_270674" OT="Product" TT="267772" VC="CTX\_english" VO="935905" W="Approved" />