


Enhanced Fire Safety Cable solid

Fire alarm cable, 300/500V

halogen-free, with improved fire characteristics,
BS 7629-1 and BS 5839-1 Enhanced

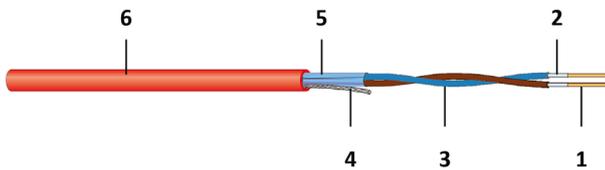

- 1 Conductor: solid
- 2 Insulation: fire resistant special compound (BS 7655)
- 3 Drain wire: tinned copper
- 4 Inner covering: glass fibre tape
- 5 Shielding: Al-laminated tape
- 6 Sheath: FRNC/LSZH



Descripción

Cable for fire alarm systems and emergency lighting for permanent installation in buildings.
Permitted operating temperature at conductor of +90°C.

Construcción

Conductor	Plain annealed copper wire, solid class 1, EN 60228
Aislamiento	Mica/Glass fire resistant tape. Fire resistant silicon rubber type EI2 to BS EN 50363-1
Colores principales	HD 308 S2, BS 7629-1
Blindaje	Aluminium/polyester tape and uninsulated tinned copper drain wire; IEC 60228, EN 60228
Material exterior de la vaina	Polyolefin compound, BS 7655-6.1, LTS3

Propiedades generales

Integridad del aislamiento	PH 120
Temperatura de instalación	-5 °C - +50 °C
Temperatura de funcionamiento	-15 °C - +90 °C

Propiedades eléctricas

Tensión de prueba a 50 Hz	2.000 V
Tensión nominal	300/500V

Propiedades mecánicas

Mínimo de flexión durante la instalación (multinúcleo)	6 x D
Radio de flexión mínimo permanente (multinúcleo)	6 x D

Estándares

Integridad de circuito (FE180)	IEC 60331 (180 minutes), VDE 0472-814 (FE180), BS 6387 C/W/Z, IEC 60331-2 (120 minutos), VDE 0482-200 (PH120), BS EN 50200
Densidad de humo	EN 61034-2, IEC 61034-2, VDE 0482-1034-2
Cero halógeno gases no corrosivos	EN 60754-1, IEC 60754-1, VDE 0482-754-1
Propagación de llamas	EN 60332-1-2, IEC 60332-1-2, VDE 0482-332-1-2
Dispersión de llamas	EN 60332-3-24, IEC 60332-3-24, VDE 0482-332-3-24
LPCB Certificate	LPCB Certificate Number: 172h, Issue: 02

Nota

Additional dimensions available on request.

Versiones

Número de material	Producto	Color de la funda exterior	Diámetro exterior de la vaina [mm]	Prop. CU [kg/km]	Resistance [Ω/km]	Voltage drop [Ω mV/A/m]	Peso [kg/km]	Carga de fuego [kWh/m]	Unidad de embalaje	GTIN / EAN
18836810ZL	Enhanced Fire Safety Cable	tinto	8,6	43	12,1	29	115	0,19	500 m bobina	40393910095913
18836810ZM	Enhanced Fire Safety Cable	tinto	8,6	43	12,1	29	115	0,19	200 m bobina	40393910095906
18836810ZN	Enhanced Fire Safety Cable	tinto	8,6	43	12,1	29	115	0,19	100 m bobina	40393910095890
18836910ZL	Enhanced Fire Safety Cable	blanco	8,6	43	12,1	29	115	0,19	500 m bobina	40393910095852
18836910ZM	Enhanced Fire Safety Cable	blanco	8,6	43	12,1	29	115	0,19	200 m bobina	40393910095845
18836910ZN	Enhanced Fire Safety Cable	blanco	8,6	43	12,1	29	115	0,19	100 m bobina	40393910095838
18837010ZL	Enhanced Fire Safety Cable	tinto	9,9	72	7,41	18	160	0,26	500 m bobina	40393910095791
18837010ZM	Enhanced Fire Safety Cable	tinto	9,9	72	7,41	18	160	0,26	200 m bobina	40393910095784
18837010ZN	Enhanced Fire Safety Cable	tinto	9,9	72	7,41	18	160	0,26	100 m bobina	40393910095777
18837110ZL	Enhanced Fire Safety Cable	blanco	9,9	72	7,41	18	160	0,26	500 m bobina	40393910095739
18837110ZM	Enhanced Fire Safety Cable	blanco	9,9	72	7,41	18	160	0,26	200 m bobina	40393910095722
18837110ZN	Enhanced Fire Safety Cable	blanco	9,9	72	7,41	18	160	0,26	100 m bobina	40393910095715
19167910ZL	Enhanced Fire Safety Cable	tinto	10,1	72	12,1	29	180	0,28	500 m bobina	40393910095005
19167910ZM	Enhanced Fire Safety Cable	tinto	10,1	72	12,1	29	180	0,28	200 m bobina	40393910094992
19167910ZN	Enhanced Fire Safety Cable	tinto	10,1	72	12,1	29	180	0,28	100 m bobina	40393910094985
19632910ZL	Enhanced Fire Safety Cable	blanco	10,1	72	12,1	29	180	0,28	500 m bobina	40393910094046
19632910ZM	Enhanced Fire Safety Cable	blanco	10,1	72	12,1	29	180	0,28	200 m bobina	40393910094039
19632910ZN	Enhanced Fire Safety Cable	blanco	10,1	72	12,1	29	180	0,28	100 m bobina	40393910094022