


## FE180 flex

Control cable flex, 300/500V, Keram

halogen-free, with improved fire characteristics,  
with reference to SEV TP 20B/3C and CENELEC HD 604 S1 part 5.H

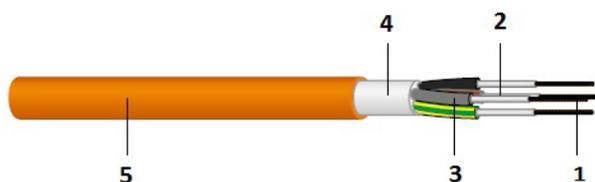

- 1 Conductor: stranded
- 2 Fire barrier: high-performance Keram compound
- 3 Insulation: cross-linked polymer, zero halogen
- 4 Filler: flame retardant, zero halogen
- 5 Sheath: FRNC / LSZH



### Descrizione

Safety cables are installed in all areas that require special protection of people and equipment against fire and fire damages and where strict security requirements must be fulfilled.

Suitable for indoor applications. For outdoor applications, protection must be provided against exposure to direct sunlight. The cable should only be laid directly in earth or water if a protective conduit is used.

Permitted operating temperature at conductor of +90°C.

### Costruzione

Conduttore	Bare copper, stranded, IEC 60228 class 5, EN 60228
Isolamento	Special compound, HD 604 S1 part 5 H
Colori delle anime	CENELEC HD 308 S2
Riempitrice	HD 604 S1 part 5 H
Materiale della guaina esterna	Compound, HD 604 S1 part 5 H

### Proprietà generali

Integrità dell'isolamento	FE 180
Installation temperature	-5 °C - +50 °C
Operating temperature	-45 °C - +90 °C

### Proprietà elettriche

Nominal voltage	300/500V
Tensione di prova a 50Hz	2.000 V

### Proprietà meccaniche

Curvatura minima durante l'installazione (multicore)	6 x D
Minimum bending radius permanent (multi core)	4 x D

## Standards

Integrità del circuito (FE180)	IEC 60331-11/-21 (180 minutes), VDE 0472-814 (FE180), BS 6387 C/W/Z, IEC 60331-1 (120 minutes), IEC 60331-2 (120 minutes), EN 50200 (PH120 minutes), VDE 0482-200 (PH120), AREI-RGIE Art.104-FR1
Densità del fumo	IEC 61034-1/-2, EN 61034-1/-2, VDE 0482-1034-1/-2, AREI-RGIE Art.104-SD, SEV TP 20B/3C 3.4.3
Zero alogeni nessun gas corrosivo	IEC 60754-1/-2, EN 60754-1/-2, VDE 0482-754-1/-2, AREI-RGIE Art.104-SA, SEV TPV11
Propagazione della fiamma	AREI-RGIE Art.104-F1, EN 60332-1-2, IEC 60332-1-2, SEV TP 20B/3C 3.4.1.1, VDE 0482-332-1-2
Flame spread	IEC 60332-3-24, EN 60332-3-24, VDE 0482-332-3-24, SEV TP 20B/3C 3.4.1.3, AREI-RGIE Art.104-F2

## Nota

Additional dimensions available on request.

## Versioni

Codice art.	Prodotto	Diametro esterno della guaina [mm]	Tasso di CU [kg/km]	Weight [kg/km]	Fire load [kWh/m]	Construction	GTIN / EAN
188335	FE180 flex 3 x 1.5	8,5	43	123	0,27	LNPE	40393910072419
187554	FE180 flex 5 x 1.5	10,3	72	182	0,40	3LNPE	40393910073645
187179	FE180 flex 5 x 2.5	12,1	120	271	0,55	3LNPE	40393910074505
192367	FE180 flex 7 x 1.5	11	101	222	0,44	6LPE	40393910067620
185228	FE180 flex 8 x 1.5	12,4	115	273	0,56	6LNPE	40393910077315
191059	FE180 flex 12 x 1.5	14	173	313	0,72	11LPE	40393910070033
191060	FE180 flex 16 x 1.5	16	231	410	0,89	15LPE	40393910070026
191061	FE180 flex 21 x 1.5	18	303	527	1,10	20LPE	40393910070019

Con riserva di modifiche tecniche

A partire da 2023-10-30 08:22:37