


FO Outdoor wbGGT HP / A-DQ(ZN)B2Y

2 x 3.1 mm, LS0H

flame retardant - IEC 60332.1

in accordance with IEC 60794-2-20

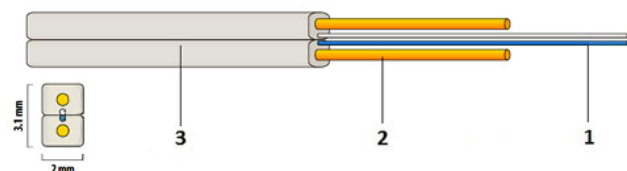

- 1 Optical fibre
- 2 Strength member
- 3 LS0H sheath



Beschrijving

Flexible fibre optic Duplex cable with strength elements, based on 2 single-fibre cables.
Special low-bend-sensitivity fibre provides a high bandwidth and excellent transmission properties.
Easy handling and easy to strip off due to the novel flute design.
Flame retardant halogen-free LS0H sheath.
Very low fire load.

Toepassing

Fibre to the Home (FTTH) indoor cabling.
In residential and commercial buildings.
Indoor cabling solutions for data network and building automation applications.
Connection cable between building entry point (BEP) and fibre optic data outlet.
Suitable for laying in ducts and vertical shafts.
For splicing in wall mounted distribution boxes and in fibre optic data outlets.

Constructie

Buitenmantel	FRNC/LSZH
--------------	-----------

Algemene eigenschappen

Installatietemperatuur	-10 °C - +50 °C
Opslagtemperatuur	-20 °C - +60 °C
Bedrijfstemperatuur	-25 °C - +70 °C
Opdruk	DATWYLER «cable type» «Datwyler designation» «DIN designation» «no. of fibres» «fibre type» «add. text» «batch no.» «meter marks»
Toepassingsgebied	Binnen

Normen / Standaards

Dwarsdrukweerstand	IEC 60794-1-21 E1
Impact	IEC 60794-1-21 E3
Herhaalde buiging	IEC 60794-1-21 E4
Torsie	IEC 60794-1-21 E6
Kabelbuiging	IEC 60794-1-21 E7
Waterindringing	IEC 60794-1-21 E11
Rookdichtheid	EN 61034-1/-2, IEC 61034-1/-2, VDE 0482-1034-1/-2
Nulhaloogen geen corrosieve gassen	EN 60754-1/-2, IEC 60754-1/-2, VDE 0482-754-1/-2
Vlamdovend	EN 60332-1-2, IEC 60332-1-2, VDE 0482-332-1-2

Versies

Materiaalnummer	Product Nee.	Artikel	Mantelkleur	Vezeltype	Categorie vezels	Buigradius [mm]	Buitenmantelafmetingen [mm]	Gewicht [kg/km]	Trekkracht [N]	Dwarsdruk tijdelijk [N]	Dwarsdruk blijvend [N]	GTIN / EAN
231000	OF131-L-B1d-02	FO Indoor Duplex	ivoor	E9/125 G.652.D OS2	OS2	20	2 x 3.1	10	60	1.000	300	
231002		FO Indoor Duplex	ivoor	E9/125 G.657. A1 OS2	OS2	20	2 x 3.1	10	60	1.000	300	