


JE-H(St)H...Bd FE180 E30 L

Wiring cable for industrial electronics, max. 225V, Keram

halogen-free, with improved fire characteristics,
with reference to VDE 0815,
circuit integrity (FE180) in accordance with VDE 0472-814, IEC 60331, EN 50200,
System Circuit Integrity E30 in accordance with DIN 4102-12

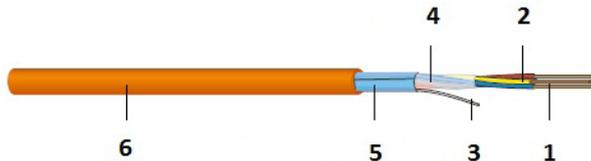

- 1 Conductor: solid
- 2 Insulation: cross-linked polymer, zero halogen
- 3 Drain wire: Ø 0.8 mm
- 4 Separator: plastic tape, zero halogen
- 5 Shielding: Al-laminated tape, zero halogen
- 6 Sheath: FRNC/LSZH



Description

Cables with intrinsic fire resistance are installed in all areas that require special protection of people and equipment against fire and fire damages and where strict security requirements must be fulfilled. Suitable for indoor applications. For outdoor applications, protection must be provided against exposure to direct sunlight. The cable should only be laid directly in earth or water if a protective conduit is used. These cables correspond to the demands of System Circuit Integrity E30* in accordance with DIN 4102-12. System Circuit Integrity is guaranteed at an operating voltage up to 110V. Permitted operating temperature at conductor of +70°C.

Construction

Conductor	Bare copper, solid, 0.8 mm diameter, VDE 0815
Insulation	Fire-resistant, cross-linked, high-performance Keram special compound, EN 50290-2-36
Core colours	VDE 0815
Shielding	Al-laminated tape with copper drain wire Ø 0.8 mm
Outer sheath material	Flame retardant polyolefin compound VDE 0819-107, EN 50290-2-27 and VDE 0250-214 "HM 2"

General properties

Circuit Integrity	E30
Insulation integrity	FE 180
Installation temperature	-5 °C - +50 °C
Operating temperature	-30 °C - +70 °C

Electrical properties

Capacitive coupling 0,8 mm, 100m @ 800Hz	200 pF/km
Maximum loop resistance 0,8 mm	73.2 Ω/km
Minimum insulation resistance	100 MΩ x km
operating capacity, 1km @ 800Hz	120 nF/km
peak voltage	225 V
Test voltage 50Hz, core/core	500 V
Test voltage 50Hz, core/screen	2,000 V

Mechanical properties

Minimal crush resistance / 10cm	1,000 N
Minimum bending during installation (multi core)	7.5 x D
Minimum bending radius permanent (multi core)	7.5 x D

Standards

Insulation Integrity (FE180)	IEC 60331-11/-21 (180 minutes), VDE 0472-814 (FE180), BS 6387 C/W/Z, IEC 60331-1 (120 minutes), IEC 60331-2 (120 minutes), EN 50200 (PH120 minutes), NBN 713-020, VDE 0482-200 (PH120), AREI-RGIE Art.104-FR1
System circuit integrity	DIN 4102-12, AREI-RGIE Art.104-FR2
Smoke density	IEC 61034-1/-2, EN 61034-1/-2, VDE 0482-1034-1/-2, AREI-RGIE Art.104-SD
Zero halogen no corrosive gases	IEC 60754-1/-2, EN 60754-1/-2, VDE 0482-754-1/-2, AREI-RGIE Art.104-SA
Flame propagation	IEC 60332-1-2, EN 60332-1-2, VDE 0482-332-1-2, AREI-RGIE Art.104-F1
Flame spread	IEC 60332-3-22/-24, EN 60332-3-22/-24, VDE 0482-332-3-22/-24, AREI-RGIE Art.104-F2

Note

System Circuit Integrity is dependent on installation method.

Versions

Material number	Product	Outer sheath colour	Outer sheath diameter [mm]	CU rate [kg/km]	Weight [kg/km]	Fire load [kWh/m]	Packing unit	GTIN / EAN
188376	JE-H(St)H...Bd FE180 E30 L 1x2x0.8 mm	orange	5.6	15	42	0.095	by the metre	40393910072150
18831800ZK	JE-H(St)H...Bd FE180 E30 L 2x2x0.8 mm	orange	6.1	25	57	0.123	1000 m drum	40393910035292
18831800ZL	JE-H(St)H...Bd FE180 E30 L 2x2x0.8 mm	orange	6.1	25	57	0.123	500 m drum	40393910035285
18831800ZZ	JE-H(St)H...Bd FE180 E30 L 2x2x0.8 mm	orange	6.1	25	59	0.123	by the metre	40393910035278
188325	JE-H(St)H...Bd FE180 E30 L 4x2x0.8 mm	orange	9	45	102	0.21	by the metre	40393910072440

Additional dimensions available on request.

Subject to technical modification

As of 2023-10-30 08:22:38