


MD-DCS Breakout-Panel 19" 4U, 16x 6/12-Port

to accept 16 MD-DCS Snap-In modules

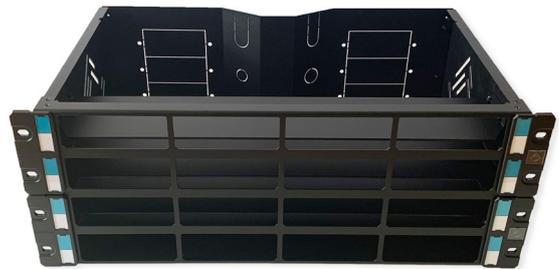

Description

Sturdy steel housing with cover 19"/4U, Black powder coating RAL 9005.
 Pre-assembled for direct installation into network and server racks. Accepts up to 16 MD-DCS Snap-In modules and/or blind covers.
 Allows for variable port density and connector combinations between LCD, SCD and MTP
 Modular and scalable system for variable fiber densities from lowest 12 fibers (SCD) to 288 fibers (MTP) per RU

Application

Modular, scalable medium-density platform for server room and data centre environment.
 Variable port densities of up to 48 LCD ports or 24 MTP ports.
 This allows for up to 96 fibers with LCD or 288 fibers with MTP₁₂ per height unit.

General properties

Acceptance capacity	16 MD-DCS Snap-In modules
System	MD-DCS
Outer dimensions (HxWxD)	4 U, 177.0 mm x 482.6 mm x 292.5 mm
Housing	Black powder coated steel, integrated 19"/4U fixation on the front
Cable entry	rear left and right with holes for M10 and M12 cable glands, left and right cut outs for 3 OV cable entry modular plates
Extractable drawer	no

Scope of delivery

19"/4U panel (19" mounting brackets) with integrated cable support plate (without plug-in modules)
 Screws, Cage Nuts, Cable Ties, Velcro Tape Strips

Versions

Material number	Product	Weight [kg]	Packing unit	GTIN / EAN
476117	MD-DCS Breakout-Panel 19" 4U, 16x 6/12-Port	2 kg	1 pc.	40393910216349



Subject to technical modification

As of 2024-03-04 12:09:58