

FO duplex patch cord LCD/PC - SCD/PC

G50/125 OM3, Duplex Fig. 0

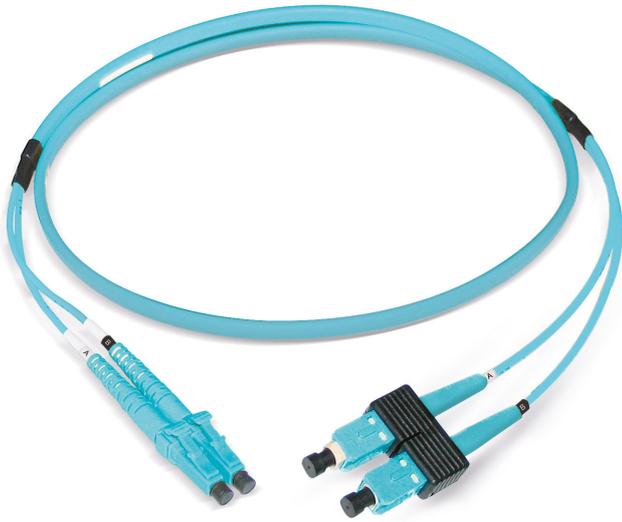


image similar

Description

Datwyler offers a broad range of terminated connectors for individual customer needs.

Construction

Cable	Duplex Fig. 0
Cable construction	I-V(ZN)HH (5.0x3.0mm)
Outer sheath colour	turquoise
Outer sheath material	LSZH

General properties

Operating temperature	-10 °C - +60 °C
-----------------------	-----------------

Optical Properties

Lifetime	1000 connections with stable attenuation values
Reproducibility of the IL	a maximum of +/- 0.1dB
Fibre type	G50/125 OM3
Ferrule material	Zirconia
Connector type side A	LCD/PC
IL maximal, connector A	0.25 dB
IL typical, connector A	0.15 dB
RL minimal, connector A	30 dB
RL typical, connector A	35 dB
Grade IEC61755, connector A (better than)	Bm2m
Standard connector A	IEC 61754-20
Connector type side B	SCD/PC
IL maximal, connector B	0.25 dB
IL typical, connector B	0.15 dB
RL minimal, connector B	30 dB
RL typical, connector B	35 dB
Grade IEC61755, connector B (better than)	Bm2m
Standard connector B	IEC 61754-4

Mechanical properties

Bending (IEC 60794-1-21 E11, reversible fibre attenuation)	≤ 0,5 dB
Connector cable retention	100 N
Crush resistance (IEC 60794-1-21 E3, reversible fibre attenuation)	≤ 0,2 dB
Tensile load (IEC 60794-1-21 E1 0,33% reversible fibre elongation)	200 N
Torsion (IEC 60794-1-21 E7, reversible fibre attenuation)	≤ 0,1 dB

Standards

Impact	IEC 60794-1-21 E4
Repeated bending	IEC 60794-1-21 E6

Versions

Material number	Product	Length (m)	Polarity	Weight [kg]	GTIN / EAN
421331	FO duplex patch cord LCD/PC - SCD/PC, G50/125 OM3	1	A to B	0.04 kg	40393910161038
421332	FO duplex patch cord LCD/PC - SCD/PC, G50/125 OM3	2	A to B	0.06 kg	40393910161021
421333	FO duplex patch cord LCD/PC - SCD/PC, G50/125 OM3	3	A to B	0.08 kg	40393910161014
421334	FO duplex patch cord LCD/PC - SCD/PC, G50/125 OM3	4	A to B	0.1 kg	40393910161007
421335	FO duplex patch cord LCD/PC - SCD/PC, G50/125 OM3	5	A to B	0.12 kg	40393910160994
421336	FO duplex patch cord LCD/PC - SCD/PC, G50/125 OM3	6	A to B	0.14 kg	40393910160987
421337	FO duplex patch cord LCD/PC - SCD/PC, G50/125 OM3	7	A to B	0.16 kg	40393910160970

Material number	Product	Length (m)	Polarity	Weight [kg]	GTIN / EAN
421338	FO duplex patch cord LCD/PC - SCD/PC, G50/125 OM3	8	A to B	0.18 kg	40393910160963
421339	FO duplex patch cord LCD/PC - SCD/PC, G50/125 OM3	9	A to B	0.2 kg	40393910160956
421340	FO duplex patch cord LCD/PC - SCD/PC, G50/125 OM3	10	A to B	0.22 kg	40393910160949

Subject to technical modification

As of 2023-11-23 14:37:01