

## FO duplex patch cord LCD/APC - SCD/APC

E9/125 G.652.D BLO, Duplex Fig. 0

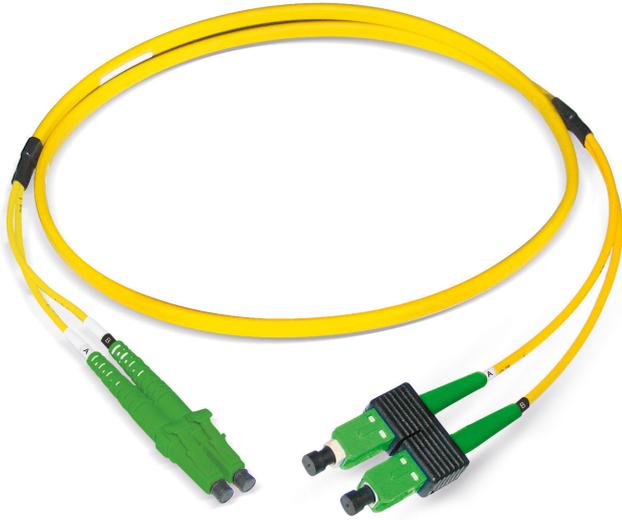


image similar

### Description

Datwyler offers a broad range of terminated connectors for individual customer needs.

### Construction

Cable	Duplex Fig. 0
Cable construction	I-V(ZN)HH (5.0x3.0mm)
Outer sheath colour	yellow
Outer sheath material	LSZH

### General properties

Operating temperature	-10 °C - +60 °C
-----------------------	-----------------

## Optical Properties

Lifetime	1000 connections with stable attenuation values
Reproducibility of the IL	a maximum of +/- 0.1dB
Fibre type	E9/125 G.652.D BLO
Ferrule material	Zirconia
Connector type side A	LCD/APC
IL maximal, connector A	0.25 dB
IL typical, connector A	0.12 dB
RL minimal, connector A	65 dB
RL typical, connector A	70 dB
Grade IEC61755, connector A (better than)	B1
Standard connector A	IEC 61754-20
Connector type side B	SCD/APC
IL maximal, connector B	0.25 dB
IL typical, connector B	0.12 dB
RL minimal, connector B	65 dB
RL typical, connector B	70 dB
Grade IEC61755, connector B (better than)	B1
Standard connector B	IEC 61754-4

## Mechanical properties

Bending (IEC 60794-1-21 E11, reversible fibre attenuation)	≤ 0,5 dB
Connector cable retention	100 N
Crush resistance (IEC 60794-1-21 E3, reversible fibre attenuation)	≤ 0,2 dB
Tensile load (IEC 60794-1-21 E1 0,33% reversible fibre elongation)	200 N
Torsion (IEC 60794-1-21 E7, reversible fibre attenuation)	≤ 0,1 dB

## Standards

Impact	IEC 60794-1-21 E4
Repeated bending	IEC 60794-1-21 E6

## Versions

Material number	Product	Length (m)	Polarity	Weight [kg]	GTIN / EAN
427911	FO duplex patch cord LCD/APC - SCD/APC, E9/125 G.652.D OS2	1	A to B	0.04 kg	40393910153231
427912	FO duplex patch cord LCD/APC - SCD/APC, E9/125 G.652.D OS2	2	A to B	0.06 kg	40393910153224
427913	FO duplex patch cord LCD/APC - SCD/APC, E9/125 G.652.D OS2	3	A to B	0.08 kg	40393910153217
427914	FO duplex patch cord LCD/APC - SCD/APC, E9/125 G.652.D OS2	4	A to B	0.1 kg	40393910153200
427915	FO duplex patch cord LCD/APC - SCD/APC, E9/125 G.652.D OS2	5	A to B	0.12 kg	40393910153194
427916	FO duplex patch cord LCD/APC - SCD/APC, E9/125 G.652.D OS2	6	A to B	0.14 kg	40393910153187
427917	FO duplex patch cord LCD/APC - SCD/APC, E9/125 G.652.D OS2	7	A to B	0.16 kg	40393910153170

Material number	Product	Length (m)	Polarity	Weight [kg]	GTIN / EAN
427918	FO duplex patch cord LCD/APC - SCD/ APC, E9/125 G.652.D OS2	8	A to B	0.18 kg	40393910153163
427919	FO duplex patch cord LCD/APC - SCD/ APC, E9/125 G.652.D OS2	9	A to B	0.2 kg	40393910153156
427920	FO duplex patch cord LCD/APC - SCD/ APC, E9/125 G.652.D OS2	10	A to B	0.22 kg	40393910153149

Subject to technical modification

As of 2023-11-23 14:36:59