

RJ45 Feed-through coupler

shielded, Class E_A, 10GBase-T, 90 degrees (angled) / 180 degrees (straight)




Side 1: MS fitting
Side 2: Keystone fitting



Description

Suitable for setting up Consolidation Points and cross-connect wirings.
For the transmission of all digital and analogue applications up to Class E_A in accordance with ISO/IEC 11801, EN 50173-1 and EIA/TIA 568-B.2-10. Compact zinc die casting housing.
Angled model with small depth.
Two types of mounting in one coupling:
side 1 with MS fitting (straight variant, e.g. for usage in patch panel MPS 24x),
side 2 with Keystone fitting (straight variant, e.g. for usage in patch panel KS 24x).
Manufacturer: BTR.

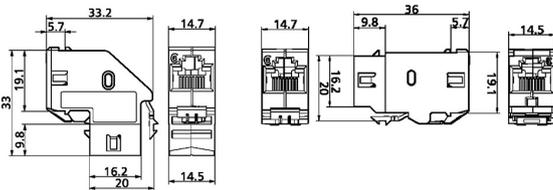

Angled design (90 degrees) Straight design (180 degrees)

Electrical properties

Gbit/s	Up to 1 Gbit/s
Shielding	shielded

Standards

Cabling standards	ISO/IEC 11801, EN 50173-1, TIA/EIA 568-x
Cat./Class	Cat.6 _A / Class E _A
Connector standards	IEC 60603-7-5

Versions

Material number	Product	Colour	Weight [kg]	Packing unit	GTIN / EAN
417445	RJ45 feed-trough coupler Class E _x , 90 degree, angled	silver	0.03 kg	1 pc.	40393910167429
417446	RJ45 feed-trough coupler Class E _y , 180 degree, straight	silver	0.03 kg	1 pc.	40393910167412

