

RJ45 Feed-through coupler

shielded, Class E_A, 10GBase-T, 90 degrees (angled) / 180 degrees (straight)



Side 1: MS fitting
Side 2: Keystone fitting



Descrizione

Suitable for setting up Consolidation Points and cross-connect wirings.

For the transmission of all digital and analogue applications up to Class E_A in accordance with ISO/IEC 11801, EN 50173-1 and EIA/TIA 568-B.2-10. Compact zinc die casting housing.


Angled model with small depth.

Two types of mounting in one coupling:

side 1 with MS fitting (straight variant, e.g. for usage in patch panel MPS 24x),

side 2 with Keystone fitting (straight variant, e.g. for usage in patch panel KS 24x).

Manufacturer: BTR.

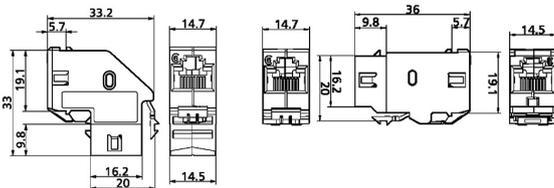

Angled design (90 degrees) Straight design (180 degrees)

Proprietà elettriche

| | |
|-------------|------------|
| Gbit/s | A 1 Gbit/s |
| Schermatura | schermati |

Standards

| | |
|---------------------|---|
| Cabling standards | ISO/IEC 11801, EN 50173-1, TIA/EIA 568-x |
| Cat./Class | Cat.6 _A / Class E _A |
| Connector standards | IEC 60603-7-5 |

Versioni

| Codice art. | Prodotto | Colore | Peso [kg] | Unità di imballaggio | GTIN / EAN |
|-------------|--|---------|-----------|----------------------|----------------|
| 417445 | RJ45 feed-trough coupler Class E _x 90 degree, angled | argento | 0,03 kg | 1 pc. | 40393910167429 |
| 417446 | RJ45 feed-trough coupler Class E _x 180 degree, straight | argento | 0,03 kg | 1 pc. | 40393910167412 |

