

## AP Outlet IP44

surface mounted

for 2 modules



AP outlet IP44 for 2 modules,  
surface mounted

### Description

Structured premises cabling in the industrial sector, for the transmission of Ethernet protocols. Outlet IP67, surface mounted, for 2 modules (types see above).


For information on the properties of the module: see data sheet of the requested module.

Cable entry from the top (one or two cables).

Shatter-proof, stable housing, grey, similar to RAL 7035.

Protection rating IP44 when closed only (without patch cords).

Delivery without modules.

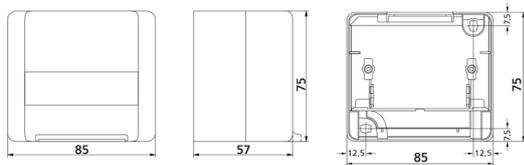

### Application

applicable for the following modules

MS-C6A 1/8 Cat. 6A shielded

MS-K 1/8 Cat. 6/EA shielded

MS-K Plus 1/8 Cat. 6A shielded

KS-T 1/8 Cat. 6/EA shielded

KS-T 5 1/8 Cat. 5/5e shielded

KU-T 1/8 Cat. 6 unshielded

KU-T 1/8 Cat. 5/5e unshielded

KS-TS 1/8 Cat. 6/EA tool-less slimline shielded

### Versions

Material number	Product	Colour	Weight [kg]	Packing unit
185728	AP Outlet IP44 for 2x MS-C6 <sub>6</sub> (delivery without modules)	light grey	0.1 kg	1 pc.
417510	AP Outlet IP44 for 2x modules with Keystone Clip (delivery without modules)	light grey	0.17 kg	1 pc.