


FO-DCS compact breakout panels, 19"/1U

with 12 or 24 LCQ adapters

for OM3, OM4 and OS2

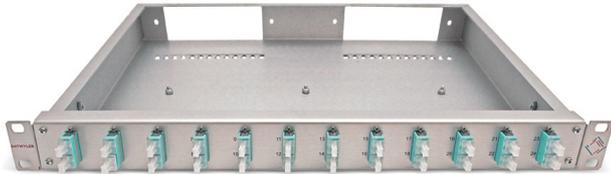

Compact 19"/1U breakout panel,
version with 12 LCQ ports, OM3 turquoise



View from rear

Description

Sturdy aluminium housing with base, side panels and front 19"/1U mounting.

Pre-assembled with 12 or 24 LC Quad adapters.

At the front the panels provide 24 duplex ports (48 fibres) or 48 duplex ports (96 fibres).

Applicazione

Compact 19"/1U breakout panels with 12 or 24 LC Quad adapters are a cost-optimised high-density solution for all high-performance applications with duplex signals, particularly in the data centre environment.

They are used to accept pre-assembled LCD trunk cables or LCD breakout cables.

Scope of delivery

19"/1U compact panel, with 19" mounting brackets

Aluminium front panel, fitted with 12 or 24 LC Quad adapters

19" mounting material

Cable support rails available as accessories.

Cable support rails available as accessories.

Can be combined with various blanking panels and management panels from the Datwyler range.

Versions

Numero Materiale	Product	Dimensioni esterne	Colore	Peso [kg]	Packing unit
470618	FO-DCS compact breakout panel, 19"/1U, 12x LCQ, OM3 turquoise	1 U, 44.4 mm x 482.6 mm x 320 mm	argento	1,5 kg	1 pc.
470619	FO-DCS compact breakout panel, 19"/1U, 12x LCQ, OM4 heather violet	1 U, 44.4 mm x 482.6 mm x 320 mm	argento	1,5 kg	1 pc.
470620	FO-DCS compact breakout panel, 19"/1U, 12x LCQ, OS2 blue	1 U, 44.4 mm x 482.6 mm x 320 mm	argento	1,5 kg	1 pc.
470621	FO-DCS compact breakout panel, 19"/1U, 12x LCQ, OS2 green	1 U, 44.4 mm x 482.6 mm x 320 mm	argento	0 kg	1 pc.
470622	FO-DCS compact breakout panel, 19"/1U, 24x LCQ, OM3 turquoise	1 U, 44.4 mm x 482.6 mm x 320 mm	argento	1,5 kg	1 pc.
470623	FO-DCS compact breakout panel, 19"/1U, 24x LCQ, OM4 heather violet	1 U, 44.4 mm x 482.6 mm x 320 mm	argento	1,5 kg	1 pc.
470624	FO-DCS compact breakout panel, 19"/1U, 24x LCQ, OS2 blue	1 U, 44.4 mm x 482.6 mm x 320 mm	argento	1,5 kg	1 pc.
470625	FO-DCS compact breakout panel, 19"/1U, 24x LCQ, OS2 green	1 U, 44.4 mm x 482.6 mm x 320 mm	argento	1,5 kg	1 pc.