


Insulation bridging

for insulated ceilings, thickness ≤ 260 mm

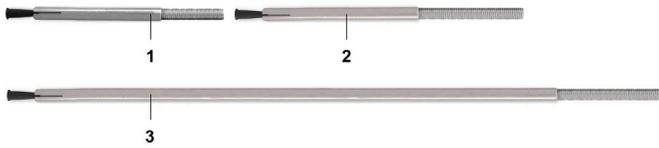


- 1 Plug K6x80
- 2 Plug K6x110
- 3 Plug K6x265

Beschrijving

Plug (or dowel) for mounting Datwyler clamps on insulated ceilings - insulation thickness: up to 260 mm. Embedment depth in concrete (x): minimum of 32 mm, plus thickness of non-flammable insulation (y).

Borehole depth = Length of plug (80, 110 or 265 mm) + Embedment depth (32 mm) = Working length (z):

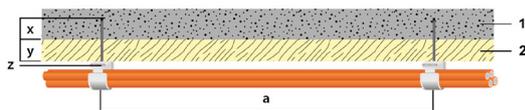

- 1 = Concrete
- 2 = Cellular or foam glass / solid insulation material
- x = Embedment depth in concrete
- y = Thickness of insulation
- z = Plug's working length for clamp
- a = Distance between "Hermann" clamps, SAS clamps, other: see "Manual Functional Integrity". Distance is the same as for direct mounting on ceilings (or walls)

Toepassing

We recommend to use the drill bit SDS 1 to expand the anchor (plug) and the tool set SMu 6 SM for pre-fabricated single clamps or the tool set SWM-SM 50 for "Hermann" clamps and profile rails/bars. Delivery without drill and tool sets. You can use a 6 mm drill and mounting tools from specialised retailers.

Noot

The suspensions take 0.3 kN for fire resistance F90.

Versions

Materiaal nummer	Artikel	Gewicht [kg]	Verpakkingseenheid
38001360ZX	Dübel K6x265	6,25 kg	100 stk.
38554640ZX	Dübel K6x110	0,03 kg	100 stk.
38554650ZX	Dübel K6x80	0,02 kg	100 stk.