

Intelligent FO patch cord LC to LC

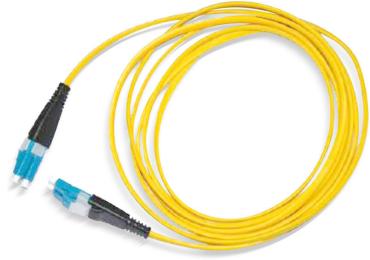


image similar

Description

Intelligent patch cords with management, fiber plus copper structure (copper is dedicated to the intelligent management) for connecting electronic (Intelligent) patch panels.

Comply to ANSI/EIA/TIA 568-C.2, ISO/IEC 11801:2002 / Amd 2:2010 and EN50173 (2011).

With LED to assist the identification of patch cord connection and to locate the other end of the patch cord when one end is connected to the patch panel.

Quick identification of patch cords when connected to Intelligent Management Unit (IMU).

Insertion Loss (IL) Single-mode LC: ≤ 0.2 dB

Multimode LC: ≤ 0.2 dB

Return Loss (RL) UPC: ≥ 50 dB

Temperature range during operation: -40

Proprietà ottiche

| | |
|-----------------------|-----|
| Connector type side A | LCD |
| Connector type side B | LCD |

Nota

These patch cords are part of Datwyler's E-cabling Solution.

Versions

| Numero Materiale | Product | Length (m) | Peso [kg] | Packing unit |
|------------------|---------------------------------------|------------|-----------|--------------|
| 4110679 | Intelligent Patch Cord, Fiber LC, OM3 | 2 | 0 kg | 1 pc. |
| 4110682 | Intelligent Patch Cord, Fiber LC, OS2 | 2 | 0 kg | 1 pc. |
| 4110680 | Intelligent Patch Cord, Fiber LC, OM3 | 3 | 0 kg | 1 pc. |
| 4110683 | Intelligent Patch Cord, Fiber LC, OS2 | 3 | 0 kg | 1 pc. |
| 4110681 | Intelligent Patch Cord, Fiber LC, OM3 | 5 | 0 kg | 1 pc. |
| 4110684 | Intelligent Patch Cord, Fiber LC, OS2 | 5 | 0 kg | 1 pc. |

Con riserva di modifiche tecniche

A partire da 2021-01-27 11:42:06