


Intelligent FO patch cord LC to LC

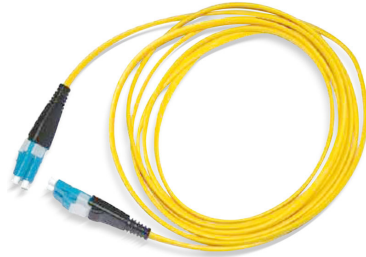

Gelijkaardig beeld

Beschrijving

Intelligent patch cords with management, fiber plus copper structure (copper is dedicated to the intelligent management) for connecting electronic (Intelligent) patch panels.

Comply to ANSI/EIA/TIA 568-C.2, ISO/IEC 11801:2002 / Amd 2:2010 and EN50173 (2011).

With LED to assist the identification of patch cord connection and to locate the other end of the patch cord when one end is connected to the patch panel.

Quick identification of patch cords when connected to Intelligent Management Unit (IMU).

Insertion Loss (IL) Single-mode LC: ≤ 0.2 dB

Multimode LC: ≤ 0.2 dB

Return Loss (RL) UPC: ≥ 50 dB

Temperature range during operation: -40

Noot

These patch cords are part of Datwyler's E-cabling Solution.

Versions

Materiaal nummer	Artikel	Lengte (m)	Gewicht [kg]	Verpakkingseenheid
4110679	Intelligent Patch Cord, Fiber LC, OM3	2	0 kg	1 stk.
4110682	Intelligent Patch Cord, Fiber LC, OS2	2	0 kg	1 stk.
4110680	Intelligent Patch Cord, Fiber LC, OM3	3	0 kg	1 stk.
4110683	Intelligent Patch Cord, Fiber LC, OS2	3	0 kg	1 stk.
4110681	Intelligent Patch Cord, Fiber LC, OM3	5	0 kg	1 stk.
4110684	Intelligent Patch Cord, Fiber LC, OS2	5	0 kg	1 stk.

Onder voorbehoud van technische wijziging

Vanaf 2021-01-22 11:00:37