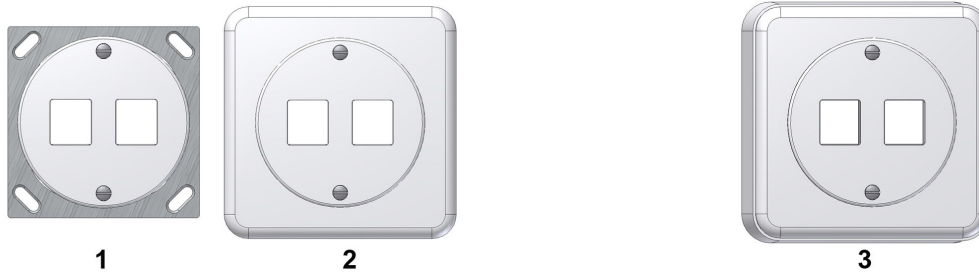# AP/UP/UP-K Faceplates 2x (Feller Standard)

surface/flush/duct mounted

for 2 Keystone or PS-GG45 modules, straight outlet, design: compatible with Feller Standard design
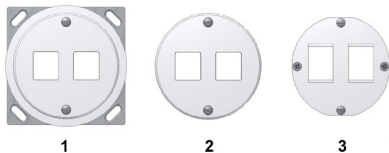SWISS STANDARD

1 Flush mounted (UP) and NUP/NAP mounted, without cover frame, with Ø 63 mm front plate and 77 x 77 mm mounting frame

3 Surface mounted (AP) with surface mounting frame 89 x 89 mm, 86 x 86 mm cover frame, and Ø 63 mm front plate, height: 54 mm

Description

Modular faceplate system, optimized by Datwyler for the installation of 2 Keystone modules, compatible with Feller Standard design.

1 Duct mounted (UP-K), without cover frame, with Ø 63 mm front plate, add-on frame Ø 72 mm and 70 x 70 mm mounting frame 2 Ø 63 mm front plate for equipment combinations 3 Keystone module holder, straight outlet, for equipment combinations

Application

Suitable for the following Datwyler modules:
- PS-GG45 7A4P, shielded
- RJ45 module KS-T Plus 1/8 Cat.6A, shielded
- RJ45 module KS-TC Plus Cat.6A (IEC), shielded
- RJ45 module MS-C6A 1/8 Cat.6A 180°-K (Keystone), shielded
- RJ45 module KS-TS 1/8 Cat.6/EA, shielded
- RJ45 module KS-T 1/8 Cat.6/EA, shielded
- RJ45 module KU Plus 1/8 Cat.6A, unshielded
- RJ45 module KU-T 1/8 Cat.6 / Cat.5e, unshielded

Versions

Material number	Product	Colour	Weight [kg]	Packing unit
440382	Faceplate, Feller Standard, for 2x KS/GG45, without cover frame	pure white	0.03 kg	20 pcs.
440380	Faceplate, Feller Standard, for 2x KS/GG45, wit 86 x 86 mm cover frame	pure white	0.05 kg	20 pcs.
440370	Faceplate, Feller Standard, for 2x KS/GG45, wit 86 x 86 mm cover frame	pure white	0.14 kg	8 pcs
440381	Faceplate, Feller Standard, for 2x KS/GG45, with add-on frame, without cover frame	pure white	0.04 kg	20 pcs.
440383	Cover frame Ø 63, Feller Standard, for 2x KS/GG45, for equipment combinations	pure white	0.02 kg	20 pcs.
440390	Keystone module holder, straight outlet for equipment combinations	pure white	0.01 kg	20 pcs.

Material number	Product	Colour	Weight [kg]	Packing unit
440410	Blank cover for faceplate, compatible with Standard®, for 2x KS/GG45	pure white	0 kg	10 pcs.

Subject to technical modification