


HD-DCS patchsnoeren LCD/PC - LCD/PC, E9/125 G.652.D BLO

Hoog prestatievermogen

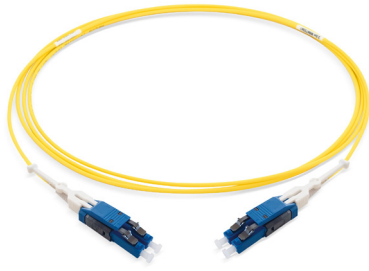

Beschrijving

Uniboot patch cable with Intelli-Cross mechanism for fast polarity change.
 Compact cable design with FR/LSOH cable sheath (2.1 mm) and 2 fibres.
 Available in standard lengths up to 10 m.
 Other lengths available on request.
 Connectivity A to A or A to B.
 Sticker labelling at both cable ends.
 Each patch cable is equipped with push-pull tabs.

Toepassing

The LCD to LCD patch cables for OM4 and OS2 are suitable for all high-performance applications with duplex signals in the data center environment.
 The round patch cables are assembled with LCD Uniboot Intelli-Cross Pro connectors (high-performance) at both ends.
 The patch cables are assembled to a very high quality and guarantee optimum values for optical performance (IL/RL).

Constructie

Buitenmantel	FR/LSZH
Mantelkleur	geel

Optische eigenschappen

Connector type side A	LCD/PC
Connector type side B	LCD/PC
Ferrule polijsting connector A	PC 0°
Ferrule polijsting connector B	PC 0°
Metalen kapmateriaal	Zirconia
Reflectieverlies RL gemiddeld connector A	55 dB
Reflectieverlies RL gemiddeld connector B	55 dB
Reflectieverlies RL minimum connector A	50 dB
Reflectieverlies RL minimum connector B	50 dB
Verzwakking IL gemiddeld connector A	0,1 dB
Verzwakking IL gemiddeld connector B	0,1 dB
Verzwakking IL maximumconnector A	0,25 dB
Verzwakking IL maximum connector B	0,25 dB
Vezeltype	E9/125 G.652.D BLO

Mechanische eigenschappen

Kleur behuizing connector A	blauw
Kleur behuizing connector B	blauw

Leveringsomvang

Duplex patch cable (FR/LSOH) with 2 fibres OS2.
 Supplied with test report.
 Powerful connector arrangement with LCD Uniboot Intelli-Cross Pro at both ends.
 Sticker labelling at both cable ends.
 Packed in a transparent plastic sleeve and labelled.

Normen / Standards

Nulhalogeen geen corrosieve gassen	IEC 60754-1/-2
Vlamdovend	IEC 60332-1-2
Vlam verspreid	IEC 60332-3-22 Cat. A
Rookdichtheid	IEC 61034-1/-2

Noot

Connectivity methods according to TIA-568-C.3 and EN 50174-1

Versions

Materiaal nummer	Artikel	Mantelkleur	Lengte (m)	Gewicht [kg]	Verpakkingseenheid
473300	HD-DCS patch cord LCD - LCD	geel	1	0,01 kg	1 stk.
473301	HD-DCS patch cord LCD - LCD	geel	2	0,02 kg	1 stk.
473302	HD-DCS patch cord LCD - LCD	geel	3	0,02 kg	1 stk.
473303	HD-DCS patch cord LCD - LCD	geel	4	0,03 kg	1 stk.
473304	HD-DCS patch cord LCD - LCD	geel	5	0,03 kg	1 stk.
473305	HD-DCS patch cord LCD - LCD	geel	6	0,03 kg	1 stk.
473306	HD-DCS patch cord LCD - LCD	geel	7	0,04 kg	1 stk.
473307	HD-DCS patch cord LCD - LCD	geel	8	0,04 kg	1 stk.
473308	HD-DCS patch cord LCD - LCD	geel	9	0,05 kg	1 stk.
473309	HD-DCS patch cord LCD - LCD	geel	10	0,05 kg	1 stk.
473320	HD-DCS patch cord LCD - LCD	geel	1	0,01 kg	1 stk.
473321	HD-DCS patch cord LCD - LCD	geel	2	0,02 kg	1 stk.
473322	HD-DCS patch cord LCD - LCD	geel	3	0,02 kg	1 stk.
473323	HD-DCS patch cord LCD - LCD	geel	4	0,03 kg	1 stk.
473324	HD-DCS patch cord LCD - LCD	geel	5	0,03 kg	1 stk.
473325	HD-DCS patch cord LCD - LCD	geel	6	0,03 kg	1 stk.
473326	HD-DCS patch cord LCD - LCD	geel	7	0,04 kg	1 stk.
473327	HD-DCS patch cord LCD - LCD	geel	8	0,04 kg	1 stk.
473328	HD-DCS patch cord LCD - LCD	geel	9	0,05 kg	1 stk.
473329	HD-DCS patch cord LCD - LCD	geel	10	0,05 kg	1 stk.