


## HD-DCS patch cord LCD/PC - LCD/PC, G50/125 OM4

High-performance

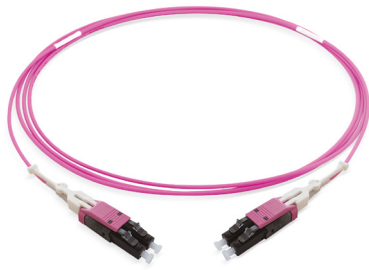

### Description

Uniboot patch cable with Intelli-Cross mechanism for fast polarity change.  
 Compact cable design with FR/LSOH cable sheath (2.1 mm) and 2 fibres.  
 Available in standard lengths up to 10 m.  
 Other lengths available on request.  
 Connectivity A to A or A to B.  
 Sticker labelling at both cable ends.  
 Each patch cable is equipped with push-pull tabs.

### Applicazione

The LCD to LCD patch cables are suitable for all high-performance applications with duplex signals in the data center environment. The round patch cables are assembled with LCD Uniboot Intelli-Cross Pro connectors (high-performance) at both ends. The patch cables are assembled to a very high quality and guarantee optimum values for optical performance (IL/RL).

### Costruzione

Outer sheath colour	heather violet
Outer sheath material	FR/LSZH

### Proprietà ottiche

Connector type side A	LCD/PC
Connector type side B	LCD/PC
Connettore per lucidatura della ghiera A	PC 0°
Connettore per lucidatura della ghiera B	PC 0°
IL maximal, connettore A	0,25 dB
IL maximal, connettore B	0,25 dB
IL tipico, connettore A	0,1 dB
IL tipico, connettore B	0,1 dB
Materiale ghiera	Zirconia
RL minimal, connector A	35 dB
RL minimal, connector B	35 dB
RL typical, connector A	40 dB
RL typical, connector B	40 dB
Tipologia di fibra	G50/125 OM4

### Proprietà meccaniche

Colore corpo connettore A	heather violet
Colore corpo connettore B	heather violet

## Scope of delivery

Duplex patch cable (FR/LSOH) with 2 fibres.  
 Supplied with test report.  
 Powerful connector arrangement with LCD Uniboot Intelli-Cross Pro at both ends.  
 Sticker labelling at both cable ends.  
 Packed in a transparent plastic sleeve and labelled.

## Standards

Zero halogen no corrosive gases	IEC 60754-1/-2
Flame Propagation	IEC 60332-1-2
Flame Spread	IEC 60332-3-22 Cat. A
Smoke Density	IEC 61034-1/-2

## Nota

Connectivity methods according to TIA-568-C.3 and EN 50174-1

## Versions

Numero Materiale	Product	Outer sheath colour	Raccordo tipo laterale A	Raccordo tipo laterale B	Length (m)	Peso [kg]	Packing unit
473400	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	1	0,01 kg	1 pc.
473401	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	2	0,02 kg	1 pc.
473402	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	3	0,02 kg	1 pc.
473403	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	4	0,03 kg	1 pc.
473404	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	5	0,03 kg	1 pc.
473405	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	6	0,03 kg	1 pc.
473406	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	7	0,04 kg	1 pc.
473407	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	8	0,04 kg	1 pc.
473408	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	9	0,05 kg	1 pc.
473409	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	10	0,05 kg	1 pc.
473420	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	1	0,01 kg	1 pc.
473421	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	2	0,02 kg	1 pc.
473422	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	3	0,02 kg	1 pc.
473423	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	4	0,03 kg	1 pc.
473424	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	5	0,03 kg	1 pc.
473425	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	6	0,03 kg	1 pc.
473426	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	7	0,04 kg	1 pc.
473427	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	8	0,04 kg	1 pc.
473428	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	9	0,05 kg	1 pc.
473429	HD-DCS patch cord LCD - LCD	heather violet	LCDU	LCDU	10	0,05 kg	1 pc.

