


HD-DCS patchsnoeren LCD/PC - LCD/PC, G50/125 OM4

Hoog prestatievermogen

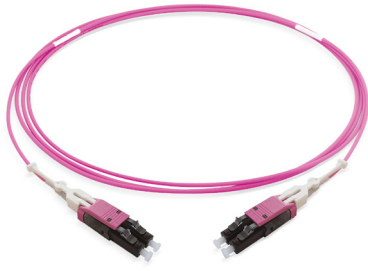

Beschrijving

Uniboot patch cable with Intelli-Cross mechanism for fast polarity change.
 Compact cable design with FR/LSOH cable sheath (2.1 mm) and 2 fibres.
 Available in standard lengths up to 10 m.
 Other lengths available on request.
 Connectivity A to A or A to B.
 Sticker labelling at both cable ends.
 Each patch cable is equipped with push-pull tabs.

Toepassing

The LCD to LCD patch cables for OM4 and OS2 are suitable for all high-performance applications with duplex signals in the data center environment.
 The round patch cables are assembled with LCD Uniboot Intelli-Cross Pro connectors (high-performance) at both ends.
 The patch cables are assembled to a very high quality and guarantee optimum values for optical performance (IL/RL).

Constructie

Buitenmantel	FR/LSZH
Mantelkleur	heidepaars

Optische eigenschappen

Connector type side A	LCD/PC
Connector type side B	LCD/PC
Ferrule polijsting connector A	PC 0°
Ferrule polijsting connector B	PC 0°
Metalen kapmateriaal	Zirconia
Reflectieverlies RL gemiddeld connector A	40 dB
Reflectieverlies RL gemiddeld connector B	40 dB
Reflectieverlies RL minimum connector A	35 dB
Reflectieverlies RL minimum connector B	35 dB
Verzwakking IL gemiddeld connector A	0,1 dB
Verzwakking IL gemiddeld connector B	0,1 dB
Verzwakking IL maximumconnector A	0,25 dB
Verzwakking IL maximum connector B	0,25 dB
Vezeltype	G50/125 OM4

Mechanische eigenschappen

Kleur behuizing connector A	heidepaars
Kleur behuizing connector B	heidepaars

Leveringsomvang

Duplex patch cable (FR/LSOH) with 2 fibres OM4.
 Supplied with test report.
 Powerful connector arrangement with LCD Uniboot Intelli-Cross Pro at both ends.
 Sticker labelling at both cable ends.
 Packed in a transparent plastic sleeve and labelled.

Normen / Standards

Nulhalogeen geen corrosieve gassen	IEC 60754-1/-2
Vlamdovend	IEC 60332-1-2
Vlam verspreid	IEC 60332-3-22 Cat. A
Rookdichtheid	IEC 61034-1/-2

Noot

Connectivity methods according to TIA-568-C.3 and EN 50174-1

Versions

Materiaal nummer	Artikel	Mantelkleur	Lengte (m)	Gewicht [kg]	Verpakkingseenheid
473400	HD-DCS patch cord LCD - LCD	heidepaars	1	0,01 kg	1 stk.
473401	HD-DCS patch cord LCD - LCD	heidepaars	2	0,02 kg	1 stk.
473402	HD-DCS patch cord LCD - LCD	heidepaars	3	0,02 kg	1 stk.
473403	HD-DCS patch cord LCD - LCD	heidepaars	4	0,03 kg	1 stk.
473404	HD-DCS patch cord LCD - LCD	heidepaars	5	0,03 kg	1 stk.
473405	HD-DCS patch cord LCD - LCD	heidepaars	6	0,03 kg	1 stk.
473406	HD-DCS patch cord LCD - LCD	heidepaars	7	0,04 kg	1 stk.
473407	HD-DCS patch cord LCD - LCD	heidepaars	8	0,04 kg	1 stk.
473408	HD-DCS patch cord LCD - LCD	heidepaars	9	0,05 kg	1 stk.
473409	HD-DCS patch cord LCD - LCD	heidepaars	10	0,05 kg	1 stk.
473420	HD-DCS patch cord LCD - LCD	heidepaars	1	0,01 kg	1 stk.
473421	HD-DCS patch cord LCD - LCD	heidepaars	2	0,02 kg	1 stk.
473422	HD-DCS patch cord LCD - LCD	heidepaars	3	0,02 kg	1 stk.
473423	HD-DCS patch cord LCD - LCD	heidepaars	4	0,03 kg	1 stk.
473424	HD-DCS patch cord LCD - LCD	heidepaars	5	0,03 kg	1 stk.
473425	HD-DCS patch cord LCD - LCD	heidepaars	6	0,03 kg	1 stk.
473426	HD-DCS patch cord LCD - LCD	heidepaars	7	0,04 kg	1 stk.
473427	HD-DCS patch cord LCD - LCD	heidepaars	8	0,04 kg	1 stk.
473428	HD-DCS patch cord LCD - LCD	heidepaars	9	0,05 kg	1 stk.
473429	HD-DCS patch cord LCD - LCD	heidepaars	10	0,05 kg	1 stk.