


Fibre pigtail 2m

G50/125 OM2

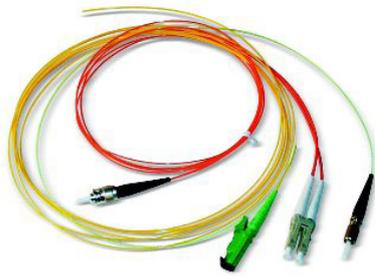

Description

Semi tight buffer, 900 µm
 Colours single pigtails: orange
 Colours sets of pigtails: in accordance with IEC 60304

Optical Properties

Connector grade (better than)	Bm2m
Ferrule material	Zirkonia
Fibre type	G50/125 OM2
Insertion loss (IL), maximal	0.3 dB
Insertion loss (IL), typical	0.15 dB
Lifetime	1000 connections with stable attenuation values
Reproducibility of the IL	maximal +/- 0.1dB
Return loss (RL), minimal	30 dB
Return loss (RL), typical	35 dB

Versions

Material number	Product	Fibre type	Connector type	Weight [kg]	Packing unit
421161	Fibre Pigtail	G50/125 OM2	SC	0.01 kg	1 pc.
421162	Fibre Pigtail	G50/125 OM2	SC	0.07 kg	1 set
422261	Fibre Pigtail	G50/125 OM2	ST	0.01 kg	1 pc.
422262	Fibre Pigtail	G50/125 OM2	ST	0.08 kg	1 set
423361	Fibre Pigtail	G50/125 OM2	LC	0.01 kg	1 pc.
423362	Fibre Pigtail	G50/125 OM2	LC	0.04 kg	1 set
424461	Fibre Pigtail	G50/125 OM2	LSH	0.01 kg	1 pc.
424462	Fibre Pigtail	G50/125 OM2	LSH	0.1 kg	1 set
425561	Fibre Pigtail	G50/125 OM2	FC/PC	0.1 kg	1 pc.
425562	Fibre Pigtail	G50/125 OM2	FC/PC	0.1 kg	1 set