

FO duplex patch cord ST/PC - LSH/APC

E9/125 G.652.D BLO, Duplex Fig. 0

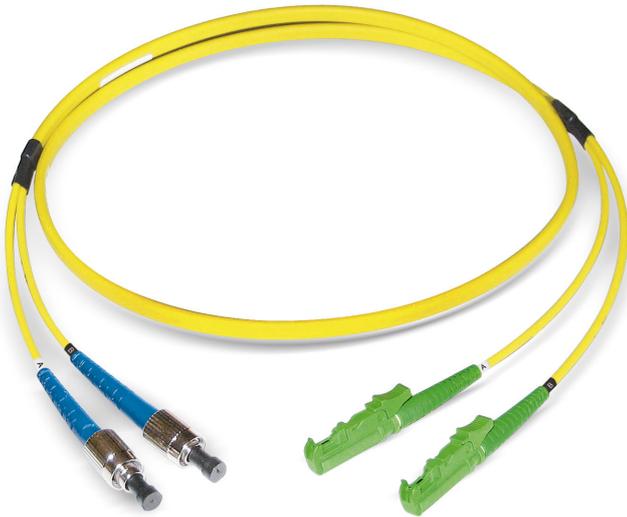


image similar

Description

Datwyler offers a broad range of terminated connectors for individual customer needs.

Construction

Cable	Duplex Fig. 0
Cable construction	I-V(ZN)HH (5.0x3.0mm)
Outer sheath colour	yellow
Outer sheath material	LSZH

General properties

Operating temperature	-10 °C - +60 °C
-----------------------	-----------------

Optical Properties

Lifetime	1000 connections with stable attenuation values
Reproducibility of the IL	a maximum of +/- 0.1dB
Fibre type	E9/125 G.652.D BLO
Ferrule material	Zirconia
Connector type side A	ST/PC
IL maximal, connector A	0.25 dB
IL typical, connector A	0.12 dB
RL minimal, connector A	50 dB
RL typical, connector A	55 dB
Grade IEC61755, connector A (better than)	B2
Standard connector A	IEC 61754-2
Connector type side B	LSH/APC
IL maximal, connector B	0.25 dB
IL typical, connector B	0.12 dB
RL minimal, connector B	65 dB
RL typical, connector B	70 dB
Grade IEC61755, connector B (better than)	B1
Standard connector B	IEC 61754-15

Mechanical properties

Bending (IEC 60794-1-21 E11, reversible fibre attenuation)	≤ 0,5 dB
Connector cable retention	100 N
Crush resistance (IEC 60794-1-21 E3, reversible fibre attenuation)	≤ 0,2 dB
Tensile load (IEC 60794-1-21 E1 0,33% reversible fibre elongation)	200 N
Torsion (IEC 60794-1-21 E7, reversible fibre attenuation)	≤ 0,1 dB

Standards

Impact	IEC 60794-1-21 E4
Repeated bending	IEC 60794-1-21 E6

Versions

Material number	Product	Length (m)	Weight [kg]	GTIN / EAN
422811	FO duplex patch cord ST/PC - LSH/APC, E9/125 G.652.D OS2	1	0.04 kg	40393910157482
422812	FO duplex patch cord ST/PC - LSH/APC, E9/125 G.652.D OS2	2	0.06 kg	40393910157475
422813	FO duplex patch cord ST/PC - LSH/APC, E9/125 G.652.D OS2	3	0.08 kg	40393910157468
422814	FO duplex patch cord ST/PC - LSH/APC, E9/125 G.652.D OS2	4	0.1 kg	40393910157451
422815	FO duplex patch cord ST/PC - LSH/APC, E9/125 G.652.D OS2	5	0.12 kg	40393910157444
422816	FO duplex patch cord ST/PC - LSH/APC, E9/125 G.652.D OS2	6	0.14 kg	40393910157437
422817	FO duplex patch cord ST/PC - LSH/APC, E9/125 G.652.D OS2	7	0.16 kg	40393910157420

Material number	Product	Length (m)	Weight [kg]	GTIN / EAN
422818	FO duplex patch cord ST/PC - LSH/APC, E9/125 G.652.D OS2	8	0.18 kg	40393910157413
422819	FO duplex patch cord ST/PC - LSH/APC, E9/125 G.652.D OS2	9	0.2 kg	40393910157406
422820	FO duplex patch cord ST/PC - LSH/APC, E9/125 G.652.D OS2	10	0.22 kg	40393910157390

Subject to technical modification

As of 2023-11-23 14:37:06