


HD-DCS patch cord LCD/PC - LCD/APC, E9/125 G.652.D BLO

High-performance

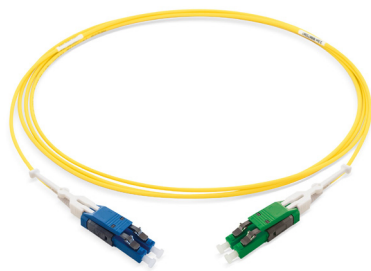

Description

Uniboot patch cable with Intelli-Cross mechanism for fast polarity change.
 Compact cable design with FR/LSOH cable sheath (2.1 mm) and 2 fibres.
 Available in standard lengths up to 10 m.
 Other lengths available on request.
 Connectivity A to A or A to B.
 Sticker labelling at both cable ends.
 Each patch cable is equipped with push-pull tabs.

Applicazione

The LCD to LCD patch cables are suitable for all high-performance applications with duplex signals in the data center environment.
 The round patch cables are assembled with LCD Uniboot Intelli-Cross Pro connectors (high-performance) at both ends.
 The patch cables are assembled to a very high quality and guarantee optimum values for optical performance (IL/RL).

Costruzione

Outer sheath colour	giallo
Outer sheath material	FR/LSZH

Proprietà ottiche

Connector type side A	LCD/PC
Connector type side B	LCD/APC
Connettore per lucidatura della ghiera A	PC 0°
Connettore per lucidatura della ghiera B	APC 8°
IL maximal, connettore A	0,25 dB
IL maximal, connettore B	0,25 dB
IL tipico, connettore A	0,1 dB
IL tipico, connettore B	0,1 dB
Materiale ghiera	Zirconia
RL minimal, connector A	50 dB
RL minimal, connector B	65 dB
RL typical, connector A	55 dB
RL typical, connector B	75 dB
Tipologia di fibra	E9/125 G.652.D BLO

Proprietà meccaniche

Colore corpo connettore A	blu
Colore corpo connettore B	verde

Scope of delivery

Duplex patch cable (FR/LSOH) with 2 fibres.
 Supplied with test report.
 Powerful connector arrangement with LCD Uniboot Intelli-Cross Pro at both ends.
 Sticker labelling at both cable ends.
 Packed in a transparent plastic sleeve and labelled.

Standards

Zero halogen no corrosive gases	IEC 60754-1/-2
Flame Propagation	IEC 60332-1-2
Flame Spread	IEC 60332-3-22 Cat. A
Smoke Density	IEC 61034-1/-2

Nota

Connectivity methods according to TIA-568-C.3 and EN 50174-1

Versions

Numero Materiale	Product	Outer sheath colour	Length (m)	Peso [kg]	Packing unit
473380	HD-DCS patch cord LCD - LCD	giallo	1	0,01 kg	1 pc.
473381	HD-DCS patch cord LCD - LCD	giallo	2	0,02 kg	1 pc.
473382	HD-DCS patch cord LCD - LCD	giallo	3	0,02 kg	1 pc.
473383	HD-DCS patch cord LCD - LCD	giallo	4	0,03 kg	1 pc.
473384	HD-DCS patch cord LCD - LCD	giallo	5	0,03 kg	1 pc.
473390	HD-DCS patch cord LCD - LCD	giallo	1	0,01 kg	1 pc.
473391	HD-DCS patch cord LCD - LCD	giallo	2	0,02 kg	1 pc.
473392	HD-DCS patch cord LCD - LCD	giallo	3	0,02 kg	1 pc.
473393	HD-DCS patch cord LCD - LCD	giallo	4	0,03 kg	1 pc.
473394	HD-DCS patch cord LCD - LCD	giallo	5	0,03 kg	1 pc.

