


Brady label
1: length [m]
2: n x connector type
3: fibre type

L=25m
8xLC/PC
G50 OM4

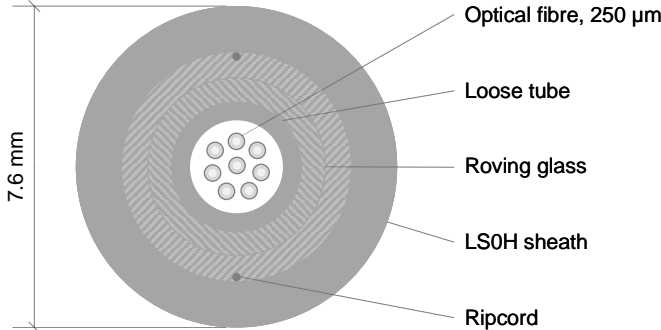

Art. No.	Cable description	CPR class	Sheath colour	Sheath Ø [mm]
19706800BZ	FO Universal-Z DLTS 1x8 E9 G.652.D BLO / U-BQ(ZN)BH	B2ca-s1a,d1,a1	Yellow	7.6
19708200BZ	FO Universal-Z DLTS 1x8 G50 OM3 / U-BQ(ZN)BH		Turquoise	
19708700BZ	FO Universal-Z DLTS 1x8 G50 OM4 / U-BQ(ZN)BH		Heather violet	

Colour code DIN (IEC 60304)

Fibres


1	2	3	4	5	6	7	8	9	10	11	12
RD	GN	BU	YE	WH	GY	BN	VT	TO	BK	OG	PK

Tubes

1	2	...
RD	GN	WH

Art. No.	Description	Connector type	Connector colour	Boot colour	Zero-fibre colour	IL mean [dB]	IL max. [dB]	RL mean [dB]	RL min. [dB]
49538100BY	FO trunk cable, 8x LC/APC, G.652.D BLO, B2ca	LC/APC	Green	Green	Yellow	0.12	0.25	70	65
49538200BY	FO trunk cable, 8x LC/APC-LC/PC, G.652.D BLO, B2ca	LC/PC	Blue	Blue		0.12	0.25	55	50
49538300BY	FO trunk cable, 8x LC/PC, G.652.D BLO, B2ca		Beige	Beige	Turquoise	0.15	0.25	35	30
49538400BY	FO trunk cable, 8x LC/PC, OM3, B2ca				Heather violet				
49538500BY	FO trunk cable, 8x LC/PC, OM4, B2ca								

Note: This list may not show all existing articles.

 Datwyler IT Infra, itinfra.datwyler.com			Description FO trunk cable, 8x LC, G.652.D BLO, OM3, OM4, B2ca					
Drawn	Philipp Bless	11.04.2025	Drawing name		DRW_FO_TC_8LC_B			
Checked	André Jaun	15.04.2025	Size	Scale	Article number	Document number	Revision	Page
Approved	Kai Wirkus	17.04.2025	A3	-	According to table	-	00	1 of 1